


Spike 36W - EL 3000K

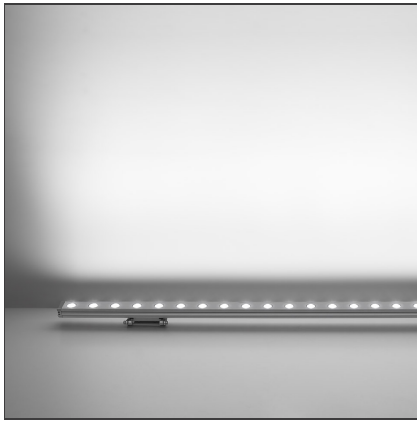

IP65  


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Wall/ceiling installation. Monochromatic version or RGB version. Body in extruded EN AW6060 T5 aluminium. Diffuser in 3mm-thick transparent metacrylate PMMA. Diffuser in 1,5mm-thick transparent polycarbonate. Stoppers in die-cast aluminium with silicone gasket. Adjustable brackets in aluminium. Electrical connection to the ballast by means of a H05RN-F (monochrome) or a 4-poles silicon/rubber cable (RGB), with IP68 terminal board supplied with the fixture (IP65 version). 24Vdc remote ballast. Painted profile with 2-stage outdoor treatment: primer, outdoor paint. Antidazzle screen in painted extruded aluminium, upon request. Optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K RGB version with red, green and blue monochromatic LEDs. IP Rating IP65. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel.

TECHNICAL DRAWINGS

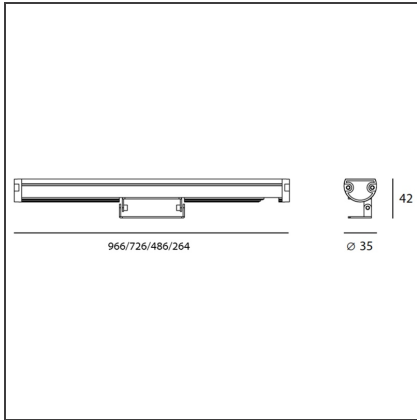

FEATURES

Article Code:	T4302ELW00	Material:	Aluminium, transparent metacrylate PMMA
Colour:	Aluminium	Series:	Outdoor
Installation:	Projector, Wall	Area contract:	Outdoor

DIMENSIONS

Length:	cm 72.6
Height:	cm 4.2
Base Diameter:	cm 3.5

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	3	Voltage:	24 Vdc
Watt:	12W		
Delivered lumens output (lm):	444lm		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Remote electronic	Delivered lumens output (lm):	1780lm
Watt:	36W	CCT:	3000K
Voltage:	24Vdc	Efficacy:	50lm/W

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 40W
24Vdc IP67
NL62040

NO
IMAGE
AVAILABLE

SPIKE 80
SCHERMO
ANTIABBAGLIAMENTO
NL50007

NO
IMAGE
AVAILABLE

Schermo
antiabbagliamento
709MM
T430803

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc IP67
NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W
24Vdc IP67
NL62880