


Spike RGB - 40°

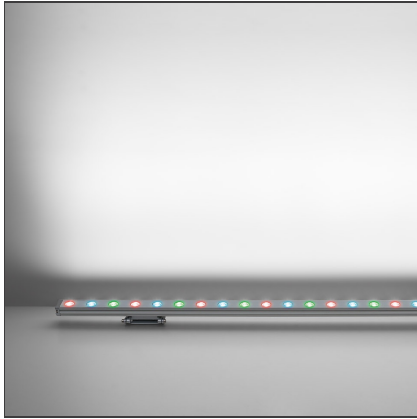

IP65  


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Wall/ceiling installation. Monochromatic version or RGB version. Body in extruded EN AW6060 T5 aluminium. Diffuser in 3mm-thick transparent metacrylate PMMA. Diffuser in 1,5mm-thick transparent polycarbonate. Stoppers in die-cast aluminium with silicone gasket. Adjustable brackets in aluminium. Electrical connection to the ballast by means of a H05RN-F (monochrome) or a 4-poles silicon/rubber cable (RGB), with IP68 terminal board supplied with the fixture (IP65 version). 24Vdc remote ballast. Painted profile with 2-stage outdoor treatment: primer, outdoor paint. Antidazzle screen in painted extruded aluminium, upon request. Optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K RGB version with red, green and blue monochromatic LEDs. IP Rating IP65. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel.

TECHNICAL DRAWINGS

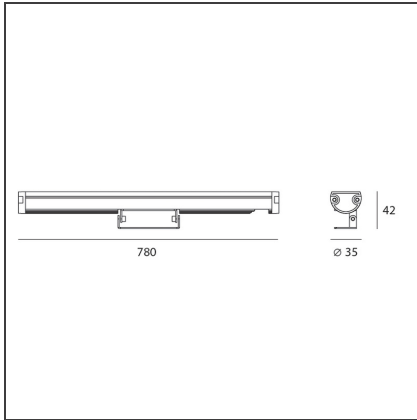

FEATURES

Article Code:	NL5003140C002	Material:	Aluminium, transparent metacrylate PMMA
Colour:	Aluminium	Series:	Outdoor
Installation:	Projector, Wall	Area contract:	Outdoor

DIMENSIONS

Length:	cm 78
Height:	cm 4.2
Base Diameter:	cm 3.5

INCLUDED SOURCES

Category:	LED	Color temperature (K):	RGB
Number:	1	Voltage:	24 Vdc
Watt:	25,2W		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Remote electronic
Watt:	25,2W
Voltage:	24Vdc

ACCESSORIES

NO
IMAGE
AVAILABLE

CAVO
COLLEGAMENTO
TASTIERA
ESTERNA
NL7833



DRIVER LED NLX 2-
100 RGB 100W
IP65
NL84100

NO
IMAGE
AVAILABLE

DRIVER LED NLX 2-
150 Max150W
IP65
NL77270



DRIVER LED NLX 2-
70 IP65
NL81260

NO
IMAGE
AVAILABLE

SPIKE RGB 78
SCHERMO
ANTIABBAGLIAMENTO
NL50035

NO
IMAGE
AVAILABLE

DSC30 interfaccia
USB - DMX stand
alone microled
NL19030

NO
IMAGE
AVAILABLE

Alimentatore
9V/350mA con
connettore mini
USB per DSC30
NL19031