


# SuperSpike 50W - 13° 3000K



IP65

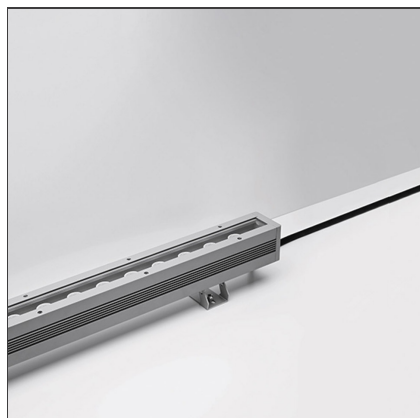

## DESIGN BY

Studio Artemide

## DESCRIPTION

Light fixture with high-performance LED light sources.

Wall/ceiling installation.


Composed by extruded aluminium body, diffuser and protection frame.

Electrical connection to the ballast by means of 110cm-long two-pole cable H07RN-F, with IP68 terminal board supplied with the fixture.

Body in extruded EN AW6060 T5 aluminium.

24Vdc remote ballast.

## TECHNICAL DRAWINGS

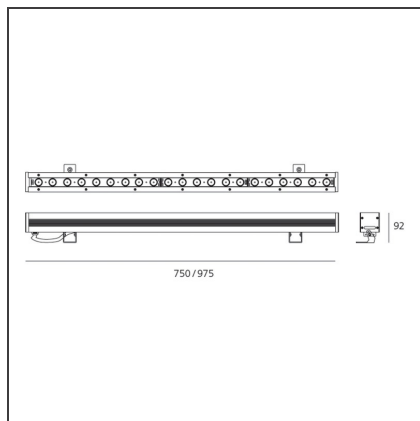

## FEATURES

<b>Article Code:</b>	NL716610K0	<b>Material:</b>	aluminium, diffuser in thick UV resistant
<b>Colour:</b>	Aluminium	<b>Series:</b>	Outdoor
<b>Installation:</b>	Wall	<b>Area contract:</b>	Outdoor
		<b>Emission:</b>	Direct adjustable

## DIMENSIONS

<b>Length:</b>	cm 75
<b>Height:</b>	cm 9.2

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Voltage:</b>	24 Vdc
<b>Watt:</b>	50W		
<b>Wattage (Single):</b>	3W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic ballast	<b>Delivered lumens output (lm):</b>	1650lm
<b>Watt:</b>	50,4W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>Efficacy:</b>	33lm/W
		<b>CRI:</b>	80

## Notes

### Spot optic

Concentrated luminous flow to highlight details avoiding unwanted light dispersion. (10° optic)

**ACCESSORIES**

---

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880