


SuperSpike 50W - 23° 3000K

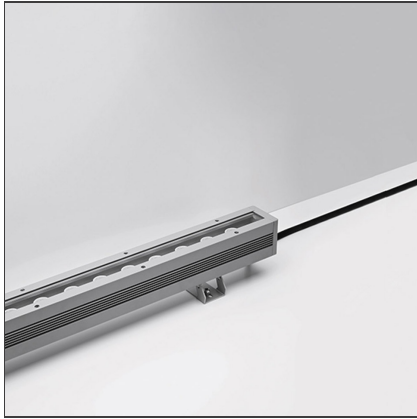

IP65  

DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources.

Wall/ceiling installation.


Composed by extruded aluminium body, diffuser and protection frame.

Electrical connection to the ballast by means of 110cm-long two-pole cable H07RN-F, with IP68 terminal board supplied with the fixture.

Body in extruded EN AW6060 T5 aluminium.

24Vdc remote ballast.

TECHNICAL DRAWINGS

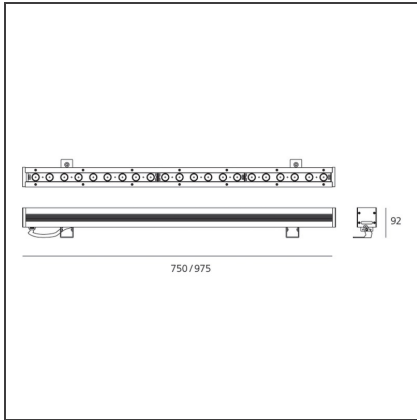

FEATURES

Article Code:	NL716625K0	Material:	aluminium, diffuser in thick UV resistant
Colour:	Aluminium	Series:	Outdoor
Installation:	Wall	Area contract:	Outdoor
		Emission:	Direct adjustable

DIMENSIONS

Length:	cm 75
Height:	cm 9.2

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Voltage:	24 Vdc
Watt:	50W		
Wattage (Single):	3W		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Electronic ballast	Delivered lumens output (lm):	1650lm
Watt:	50,4W	CCT:	3000K
Voltage:	24Vdc	Efficacy:	33lm/W
		CRI:	80

Notes

Medium optic

Medium luminous flux to highlight details, large sections of windows.(25° optic)

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc IP67
NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W
24Vdc IP67
NL62880