


SuperSpike RGB 100W - 23°

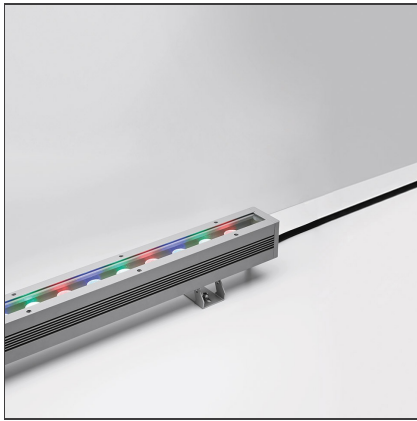

IP65  

DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources.

Wall/ceiling installation.


Composed by extruded aluminium body, diffuser and protection frame.

Electrical connection to the ballast by means of 110cm-long two-pole cable H07RN-F, with IP68 terminal board supplied with the fixture.

Body in extruded EN AW6060 T5 aluminium.

24Vdc remote ballast.

TECHNICAL DRAWINGS

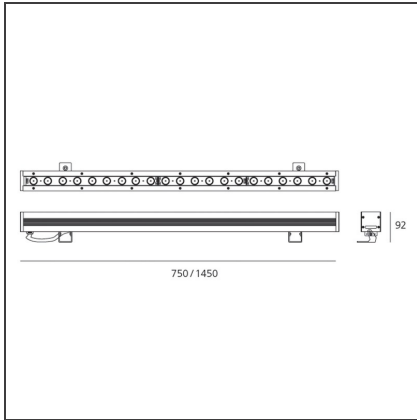

FEATURES

Article Code:	NL756625C0	Material:	aluminium, diffuser in thick UV resistant
Colour:	Aluminium	Series:	Outdoor
Installation:	Wall	Area contract:	Outdoor
		Emission:	Direct adjustable

DIMENSIONS

Length:	cm 145
Height:	cm 9.2

INCLUDED SOURCES

Category:	LED	Color temperature (K):	RGB
Number:	1	Voltage:	24Vdc
Watt:	100W		
Wattage (Single):	3W		
Type:	0		
Class:	A		

LUMINAIRE

Transformer availability:	Driver RGB
Watt:	100,8W
Voltage:	24Vdc PWM

Notes

Medium optic

Medium luminous flux to highlight details, large sections of windows.(25° optic)

ACCESSORIES

NO
IMAGE
AVAILABLE

CAVO
COLLEGAMENTO
TASTIERA
ESTERNA
NL7833



DRIVER LED NLX 2-
100 RGB 100W
IP65
NL84100



DRIVER LED NLX 2-
70 IP65
NL81260

NO
IMAGE
AVAILABLE

DSC30 interfaccia
USB - DMX stand
alone microled
NL19030

NO
IMAGE
AVAILABLE

Alimentatore
9V/350mA con
connettore mini
USB per DSC30
NL19031