


SuperSpike RGB 50W - 13°

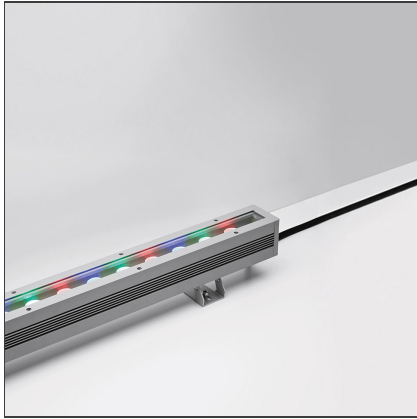

IP65  


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources.
Wall/ceiling installation.
Composed by extruded aluminium body, diffuser and protection frame.
Body in extruded EN AW6060 T5 aluminium.

TECHNICAL DRAWINGS

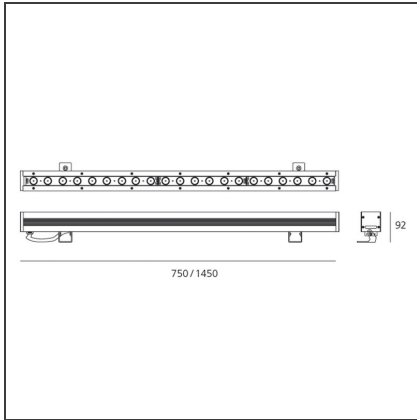

FEATURES

Article Code:	NL756510C0	Material:	aluminium,diffuser in thick UV resistant
Colour:	Aluminium	Series:	Outdoor
Installation:	Wall	Area contract:	Outdoor
		Emission:	Direct adjustable

DIMENSIONS

Length:	cm 75
Height:	cm 9.2

INCLUDED SOURCES

Category:	LED	Color temperature (K):	RGB
Number:	1	Voltage:	24Vdc
Watt:	50W		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Electronic ballast
Watt:	50,4W
Voltage:	24Vdc PWM

Notes

Spot optic
Concentrated luminous flow to highlight details avoiding unwanted light dispersion.(10° optic)

ACCESSORIES

CAVO
COLLEGAMENTO
TASTIERA
ESTERNA
NL7833



DRIVER LED NLX 2-
100 RGB 100W
IP65
NL84100



DRIVER LED NLX 2-
70 IP65
NL81260



Alimentatore
9V/350mA con
connettore mini
USB per DSC30
NL19031



DSC30 interfaccia
USB - DMX stand
alone microled
NL19030