

# Talo sospensione LED 120 Dimmable - Silver




IP20

Dimmerable: + -

## DESIGN BY

Neil Poulton

## TECHNICAL DRAWINGS

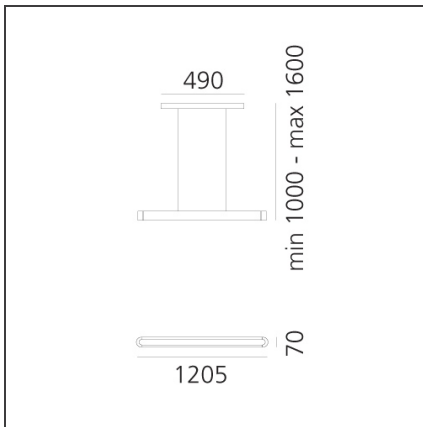

## FEATURES

<b>Article Code:</b>	1924020A	<b>Material:</b>	Aluminium, methacrylate, polycarbonate
<b>Colour:</b>	Silver	<b>Series:</b>	Design
<b>Installation:</b>	Suspension	<b>Area contract:</b>	Hospitality, null, Retail, Office
<b>Environment:</b>	Indoor	<b>Emission:</b>	Indirect Flood/direct Dark Light

## DIMENSIONS

<b>Length:</b>	cm 120	<b>Glow Wire Test:</b>	650
<b>Width:</b>	cm 7		
<b>Height:</b>	cm 100		
<b>Base Length:</b>	cm 49		
<b>Max Height from ceiling:</b>	cm 160		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	6	<b>Color Tolerance:</b>	MacAdam 3SDCM
<b>Watt:</b>	6.72W	<b>CRI:</b>	80
<b>Delivered lumens output (lm):</b>	1014lm	<b>Efficacy:</b>	151lm/W
<b>Type:</b>	0	<b>Service Life:</b>	50000-L70
<b>Class:</b>	A		
<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 3SDCM
<b>Watt:</b>	6.72W	<b>CRI:</b>	80
<b>Delivered lumens output (lm):</b>	1019lm	<b>Efficacy:</b>	152lm/W
<b>Type:</b>	0	<b>Service Life:</b>	50000-L70
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic Dimmable Dsi Integrated	<b>Delivered lumens output (lm):</b>	5772lm
<b>Watt:</b>	51W	<b>CCT:</b>	3000K
<b>Voltage:</b>	220-240V	<b>Efficiency:</b>	79%
		<b>Efficacy:</b>	113.18lm/W
		<b>CRI:</b>	80
		<b>Dimmable Typology:</b>	Push

## Notes

Lamp included. Available mono or double tube (on the same line), in different lengths according to the power of the light source. The suspension cables are also feed cables.