

# Talo wall 60 LED Dimmable - White




IP20 Dimmerable:

## DESIGN BY

Neil Poulton

## DESCRIPTION

## TECHNICAL DRAWINGS

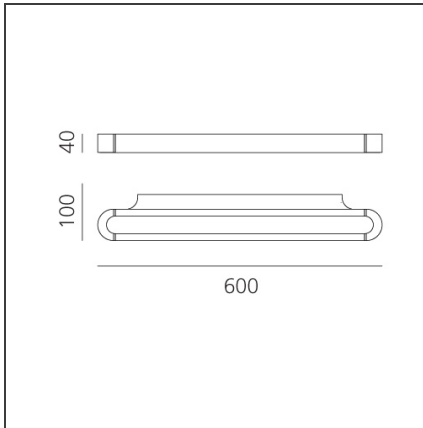

## FEATURES

|                      |          |                       |  |
|----------------------|----------|-----------------------|--|
| <b>Article Code:</b> | 1914040A | <b>Material:</b>      | Aluminium, methacrylate, polycarbonate |
| <b>Colour:</b>       | White    | <b>Series:</b>        | Design                                 |
| <b>Installation:</b> | Wall     | <b>Area contract:</b> | Hospitality, null                      |
| <b>Environment:</b>  | Indoor   | <b>Emission:</b>      | Direct/indirect                        |

## DIMENSIONS

|                |       |                        |     |
|----------------|-------|------------------------|-----|
| <b>Length:</b> | cm 60 | <b>Glow Wire Test:</b> | 650 |
| <b>Width:</b>  | cm 10 |                        |     |
| <b>Height:</b> | cm 4  |                        |     |

## INCLUDED SOURCES

|                                      |       |                               |               |
|--------------------------------------|-------|-------------------------------|---------------|
| <b>Category:</b>                     | LED   | <b>Color temperature (K):</b> | 3000K         |
| <b>Number:</b>                       | 4     | <b>Color Tolerance:</b>       | MacAdam 3SDCM |
| <b>Watt:</b>                         | 5.78W | <b>CRI:</b>                   | 80            |
| <b>Delivered lumens output (lm):</b> | 851lm | <b>Efficacy:</b>              | 147lm/W       |
| <b>Type:</b>                         | 0     | <b>Service Life:</b>          | 50000-L70     |
| <b>Class:</b>                        | A     |                               |               |

## LUMINAIRE

|                 |          |                                      |            |
|-----------------|----------|--------------------------------------|------------|
| <b>Watt:</b>    | 25W      | <b>Delivered lumens output (lm):</b> | 2923lm     |
| <b>Voltage:</b> | 220-240V | <b>CCT:</b>                          | 3000K      |
|                 |          | <b>Efficiency:</b>                   | 81%        |
|                 |          | <b>Efficacy:</b>                     | 116.92lm/W |
|                 |          | <b>CRI:</b>                          | 80         |