

# Vector Track 40 10W 13° 4000K DALI White



IP20  Dimmerable: +  -


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Three sizes with three different beam angles each (spot, flood, wide flood) obtained by means of refractive or hybrid optical units. Vector 55 track DALI zoom optic (22°-32°). Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation and 90° tilting for maximum emission adjustment freedom. Vector 95 available only in track version. Version with compact 4-conductor (3p+n) adapter with hidden LED driver and not-dimmable phase selector.

## TECHNICAL DRAWINGS

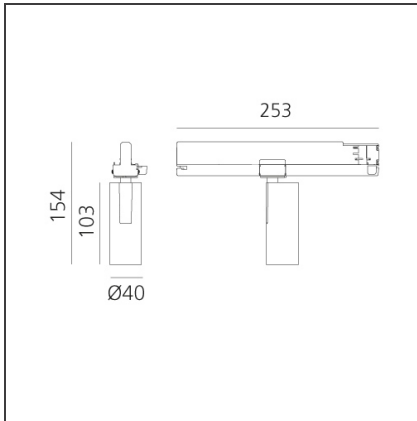

## FEATURES

|                      |                  |                |                                     |
|----------------------|------------------|----------------|-------------------------------------|
| <b>Article Code:</b> | AN05601          | <b>Series:</b> | Indoor, 2018<br>Artemide Collection |
| <b>Colour:</b>       | White            |                |                                     |
| <b>Installation:</b> | Projector, Track |                |                                     |
| <b>Environment:</b>  | Indoor           |                |                                     |

## DIMENSIONS

|                     |         |
|---------------------|---------|
| <b>Height:</b>      | cm 15.4 |
| <b>Base Length:</b> | cm 25.3 |
| <b>Inclination:</b> | -90+90  |
| <b>Rotation:</b>    | cm 360  |

## INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 4000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 3SDCM   |
| <b>Watt:</b>     | 10W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |
| <b>Class:</b>    | A   |                               |                 |

## LUMINAIRE

|              |     |                                      |           |
|--------------|-----|--------------------------------------|-----------|
| <b>Watt:</b> | 10W | <b>Delivered lumens output (lm):</b> | 540lm     |
|              |     | <b>CCT:</b>                          | 4000K     |
|              |     | <b>Efficiency:</b>                   | 81%       |
|              |     | <b>Efficacy:</b>                     | 54.09lm/W |
|              |     | <b>CRI:</b>                          | 90        |
|              |     | <b>Dimmable Typology:</b>            | Dali      |

## Notes


220/240Vac 50/60Hz Electronic ballast included.

**ACCESSORIES**


Accessories holder  
- Vector 40  
AP90100



Lens for elliptical  
emission - Vector  
40  
AP90200



Soft filter - Vector  
40  
AP90300



Anti-dazzle louvre  
- Vector 40  
AP90400