


Artemide®


Algoritmo system

design
C. de Bevilacqua
P. di Arianello




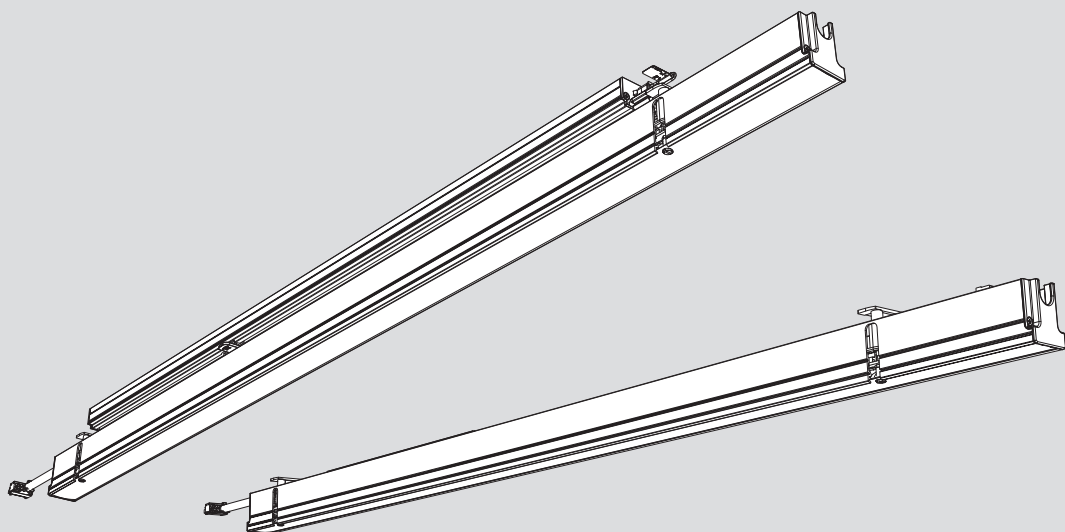


i


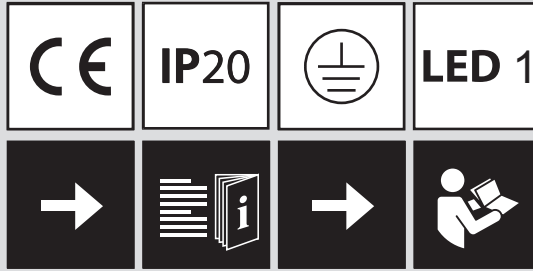


1184 mm			2368 mm		
	W	B16*		W	B16*
	32	24 Pz		65	18 Pz
	34	24 Pz		66	18 Pz
	57	12 Pz		122	9 Pz
	59	12 Pz		124	10 Pz


* = MCB 16A type B

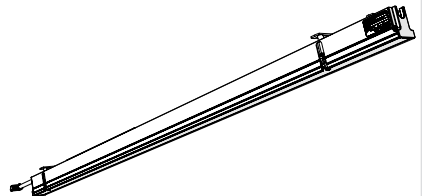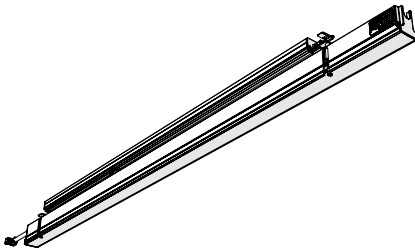

1a

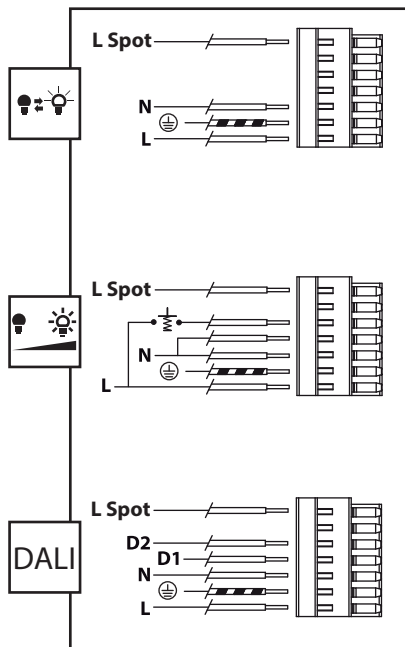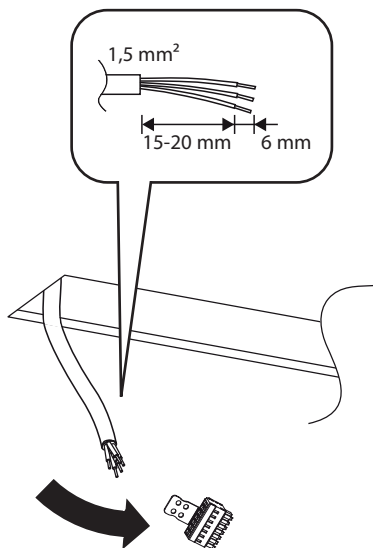


1b

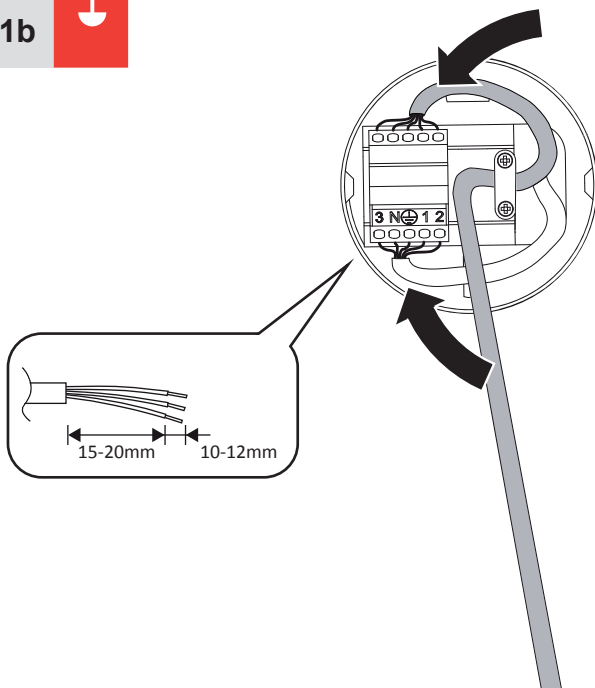





non dimmable

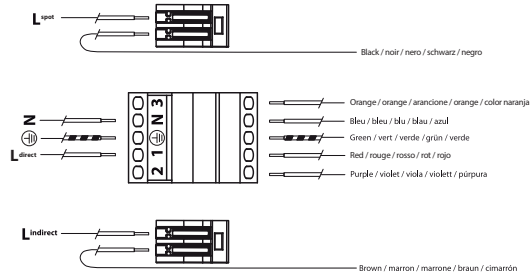


dimmable DALI

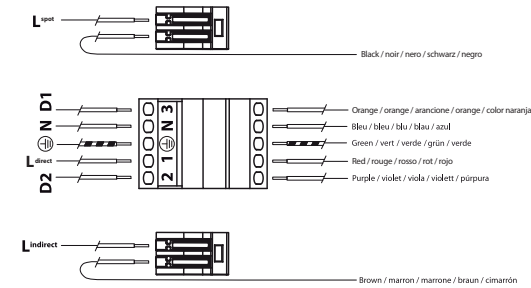


dimmable SWITCHDIM

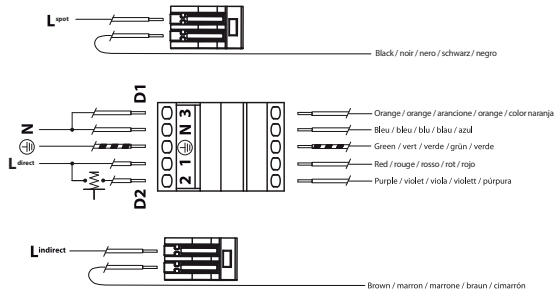


LED RGB




3a

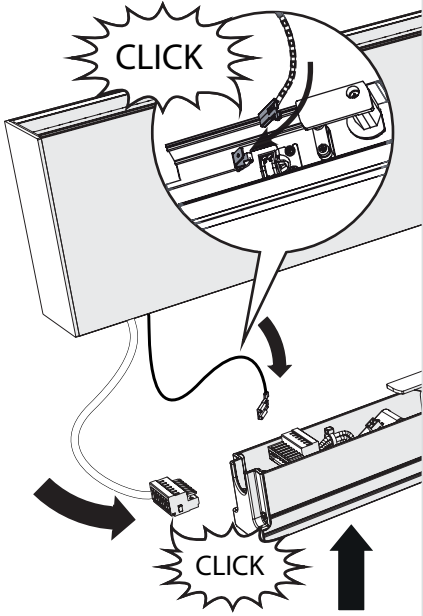




4a

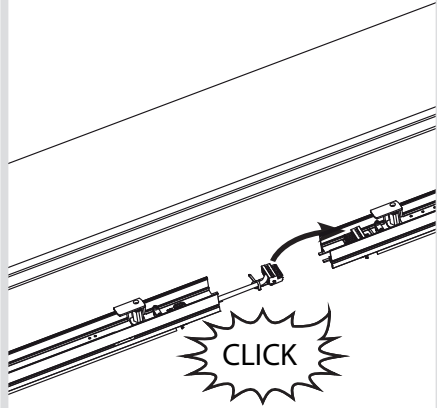


5a

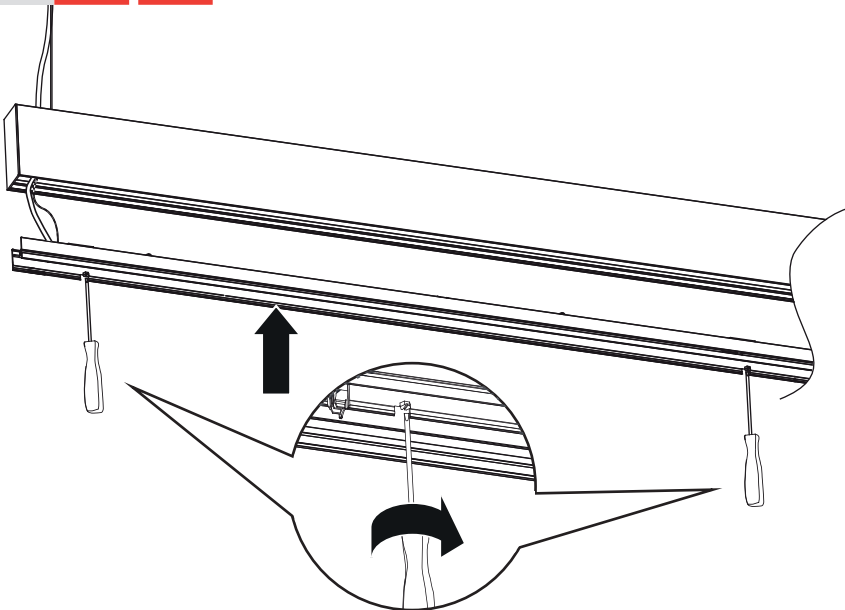


6a

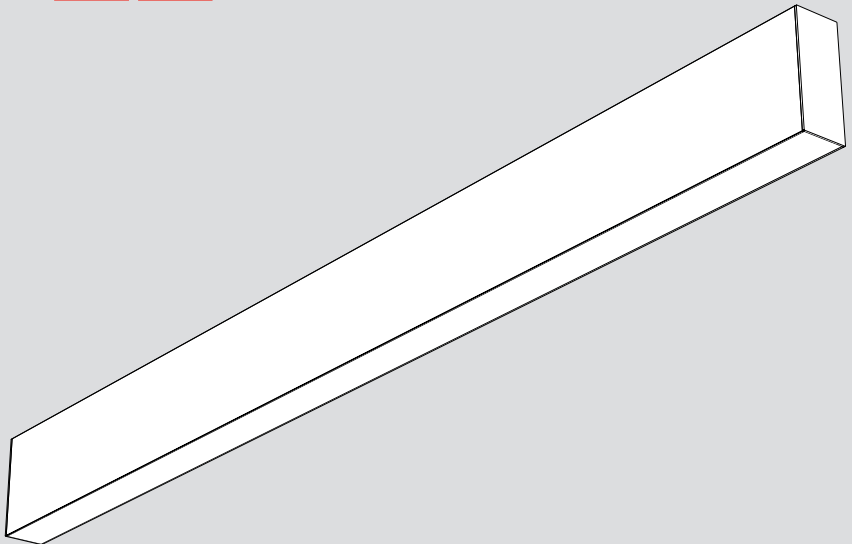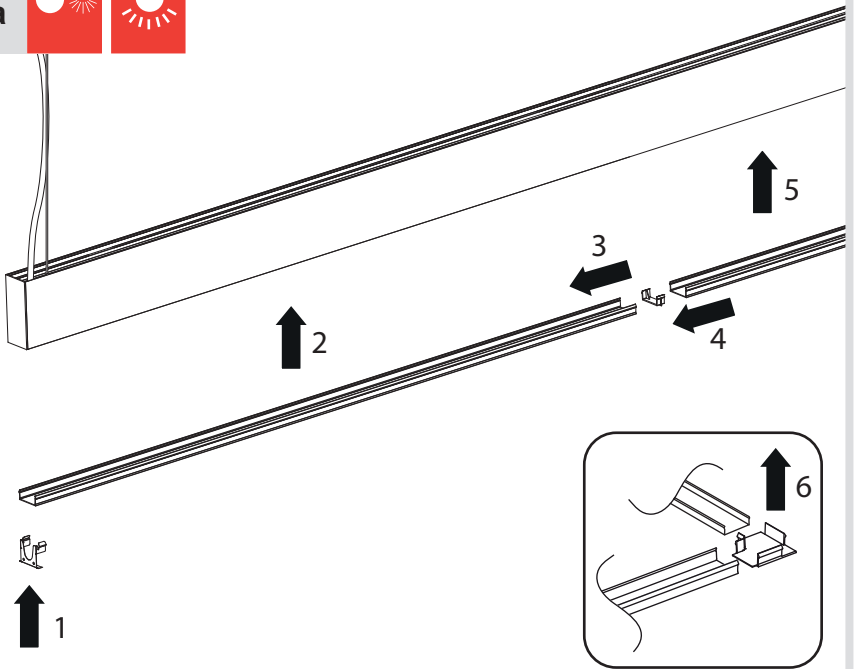


3b

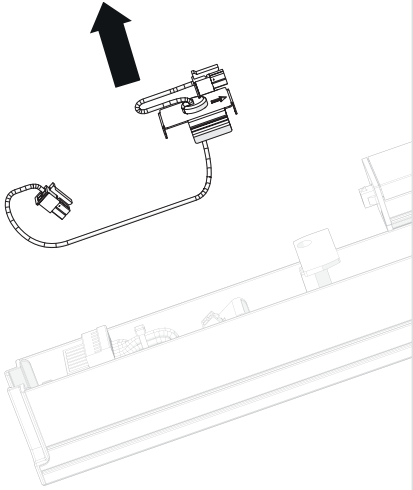


4b

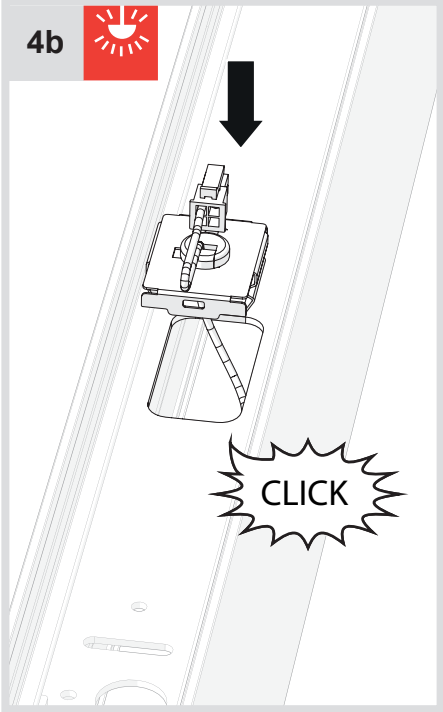


5b

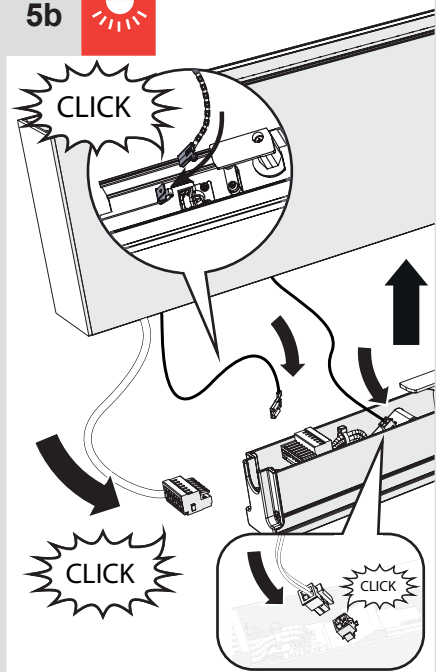


6b

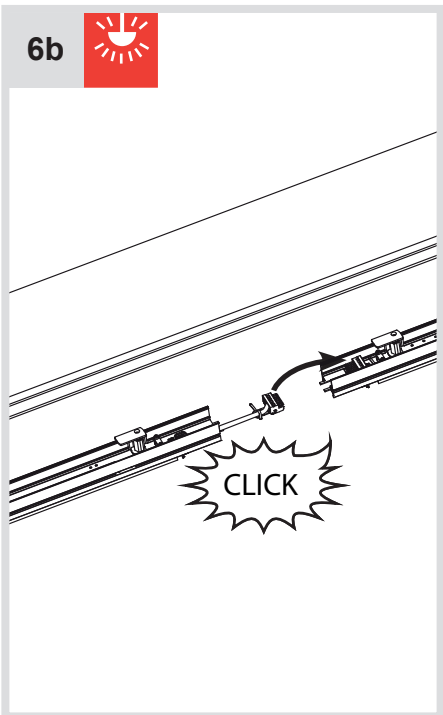


7b

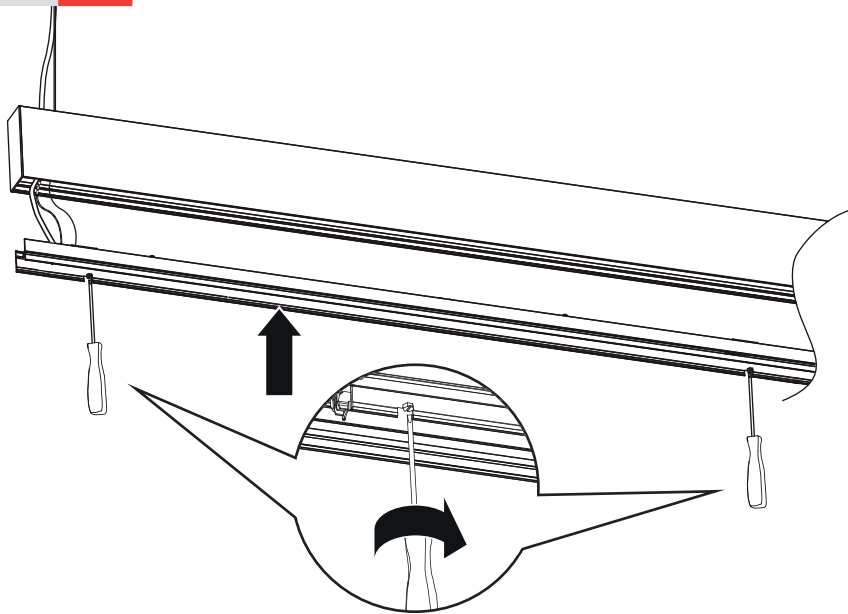


8b

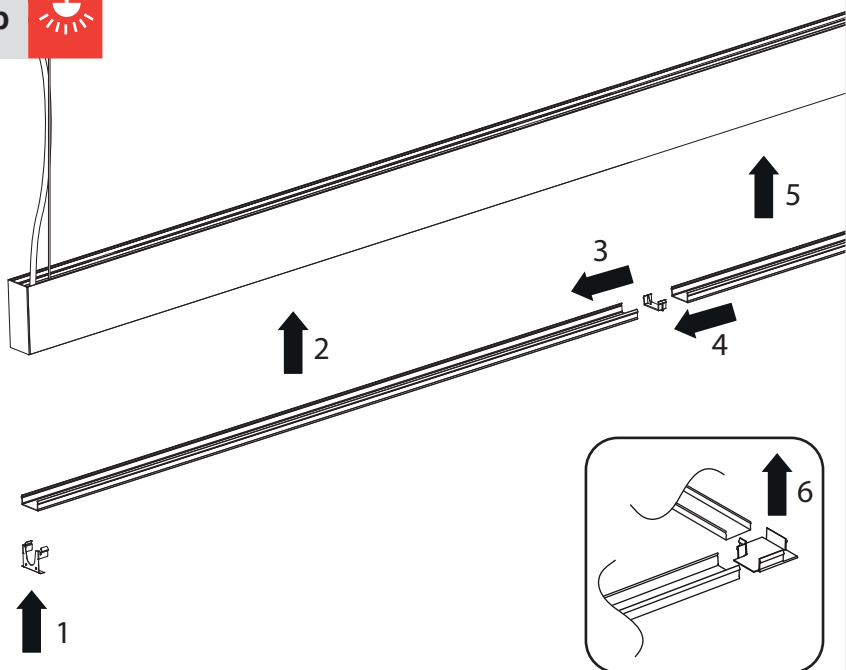


9b

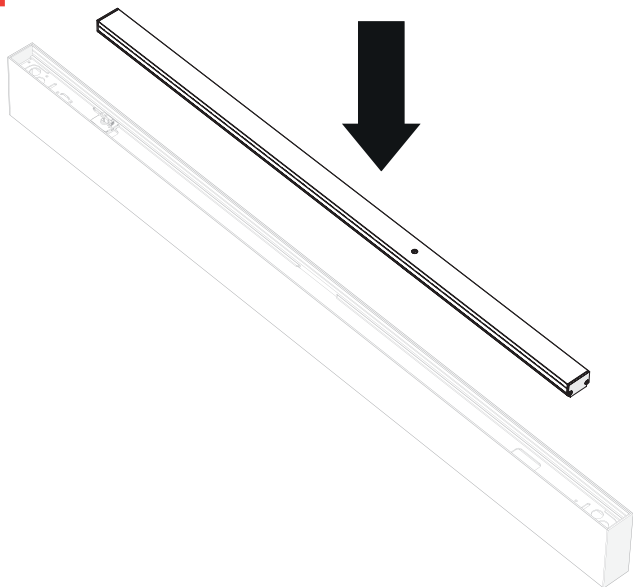



10b

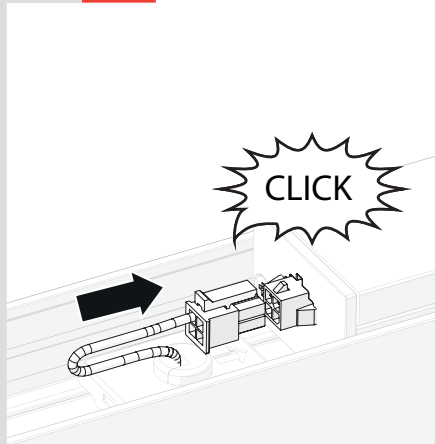

11b

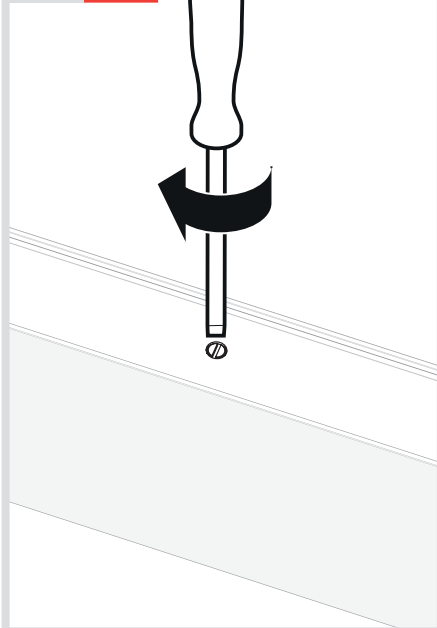

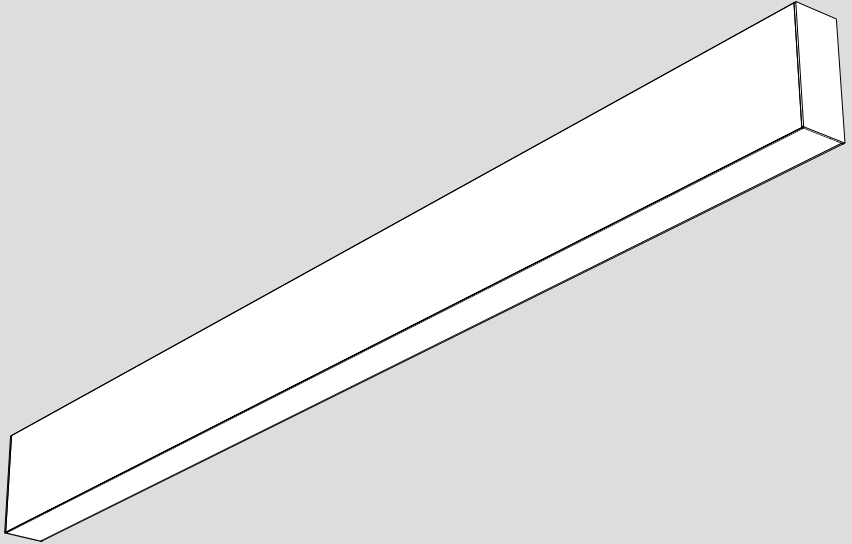

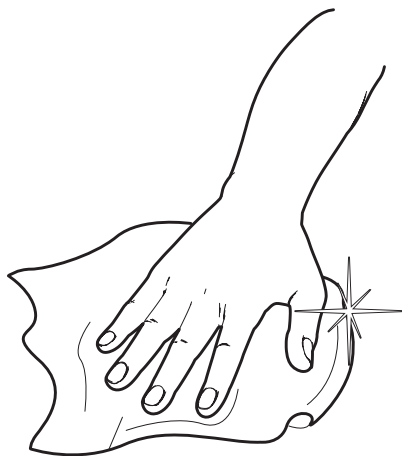

Artemide®



Artemide

via Bergamo, 18
20010 Pregnana M.se (MI)
ITALIA

tel. +39 02 935 181
fax +39 02 935 90 254
fax +39 02 935 90 496

www.artemide.com

VAT IT00846890150

cod. Y513000416