

**BEGA****12 062.2**

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Recessed LED ceiling luminaire · indoor luminaire with hand-blown crystal glass and metal housing for connection to external LED power supply unit. A focusing / dispersing lens bundles the powerful LED light in the centre of the reflector for a direct proportion of downlight. At the same time, a proportion of the dispersed light is used to illuminate the luminaire glass and to generate the vertical illuminance. For installation into ceilings with a shallow depth in interior areas.

### Product description

Luminaire housing made of metal  
Ceiling frame ring stainless steel finish  
Crystal glass with screw neck  
Additional focusing / diffusing lens made of partially frosted crystal glass  
Reflector made of pure, high-gloss anodized aluminium  
Silicone gasket  
Fixing is achieved by using two adjustable wedge-shaped claws  
Connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI.  
Safety class III   
**CE** – Conformity mark  
Weight: 0.7 kg

### Lighting technology

Half beam angle 45°  
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

### Lamp


Module connected wattage	5.7 W
Luminaire connected wattage	7.2 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a\text{ max}} = 35\text{ °C}$

### 12 062.2 K3

Module designation	LED-0329/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	750 lm
Luminaire luminous flux	552 lm
Luminaire luminous efficiency	76,7 lm/W

### 12 062.2 K4

Module designation	LED-0329/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	775 lm
Luminaire luminous flux	570 lm
Luminaire luminous efficiency	79,2 lm/W

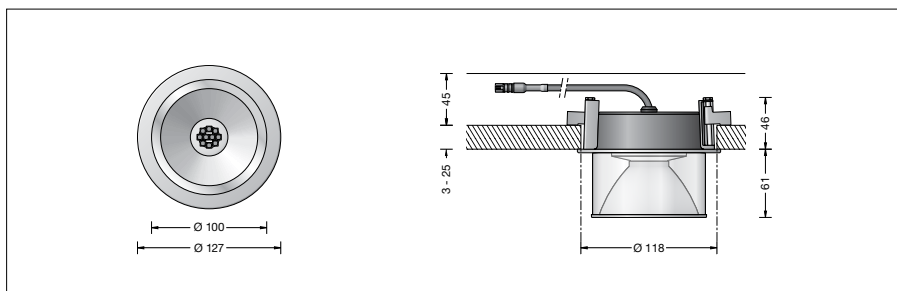

### Service life of the LED

Ambient temperature  $t_a = 25\text{ °C}$   
– at > 500,000h: L70B50

max. ambient temperature  $t_a = 35\text{ °C}$   
– at 322,000h: L70B50

### Accessories

Power supply units for LED luminaires  
220-240 V · 0/50-60 Hz with strain relief and plug connector system.

**13 176** Power supply unit on/off

**13 172** Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

**13 024** Installation housing

For the accessories a separate instructions for use can be provided upon request.

### Article No. 12 062.2

LED colour temperature optionally 3000 K or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

### Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Polished aluminium code number **.3**

### Light distribution

