

BEGA**12 064.3**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

Recessed LED ceiling luminaire · indoor luminaire with hand-blown crystal glass and metal housing for connection to external LED power supply unit. A focusing / dispersing lens bundles the powerful LED light in the centre of the reflector for a direct proportion of downlight. At the same time, a proportion of the dispersed light is used to illuminate the luminaire glass and to generate the vertical illuminance. For installation into ceilings with a shallow depth in interior areas.

Product description

Luminaire housing made of metal
Polished aluminium ceiling trim ring
Crystal glass with screw neck
Additional focusing / dispersing lens made of partially frosted crystal glass
Reflector made of pure, high-gloss anodized aluminium
Silicone gasket
Fixing is achieved by using two adjustable wedge-shaped claws
2 connecting cables with strain relief and plug connector system for BEGA power supply unit, on/off or DALI
Safety class III 
CE – Conformity mark
Weight: 1.2 kg

Lighting technology

Half beam angle 40°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Lamp


| | |
|-----------------------------|-----------------------------------|
| Module connected wattage | 13.5 W |
| Luminaire connected wattage | 16.5 W |
| Rated temperature | $t_a = 25\text{ °C}$ |
| Ambient temperature | $t_{a\text{ max}} = 40\text{ °C}$ |

12 064.3 K3

| | |
|-------------------------------|--------------|
| Module designation | LED-0328/930 |
| Colour temperature | 3000 K |
| Colour rendering index | CRI > 90 |
| Module luminous flux | 2135 lm |
| Luminaire luminous flux | 1637 lm |
| Luminaire luminous efficiency | 99,2 lm/W |

12 064.3 K4

| | |
|-------------------------------|--------------|
| Module designation | LED-0328/940 |
| Colour temperature | 4000 K |
| Colour rendering index | CRI > 90 |
| Module luminous flux | 2200 lm |
| Luminaire luminous flux | 1686 lm |
| Luminaire luminous efficiency | 102,2 lm/W |

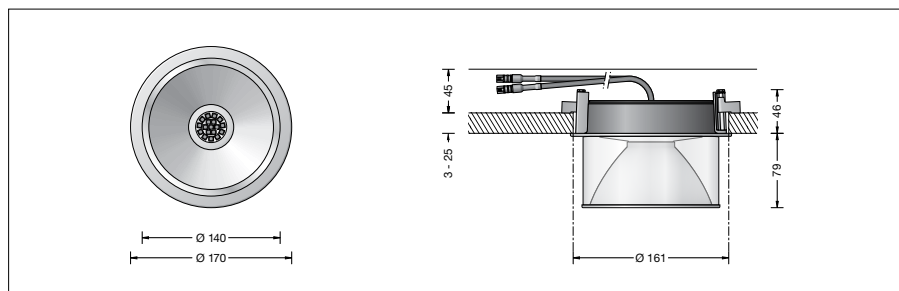

Lifetime of the LED

Ambient temperature $t_a = 15\text{ °C}$
– at 50,000 h: L90B10
– at > 500,000 h: L70B50

Ambient temperature $t_a = 25\text{ °C}$
– at 50,000 h: L90B10
– at 372,000 h: L70B50

max. ambient temperature $t_a = 40\text{ °C}$
– at 50,000 h: L90B50
– at 149,000 h: L70B50

Article No. 12 064.3

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Finish options

- Enamel, white Code number **.1**
- Stainless steel Code number **.2**
- Polished aluminium Code number **.3**

Accessories

Power supply units for LED luminaires
220-240 V · 0/50-60 Hz with strain relief and plug connector system.

- 13 201** Power supply unit on/off
13 204 Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

13 026 Installation housing

For the accessories a separate instructions for use can be provided upon request.