

BEGA**12 140**

Ceiling and wall luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with bayonet closure
2 mounting holes \varnothing 5.5 mm
Distance apart 230 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 11 mm max. 5 x 1.5[□]
Connection terminal 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 2.8 kg

Lamp

Module connected wattage	16.8 W
Luminaire connected wattage	20 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a\max} = 35$ °C

12 140 K3


Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	2110 lm
Luminaire luminous flux	1437 lm
Luminaire luminous efficiency	71,8 lm/W

12 140 K2

Colour temperature	2700 K
Colour rendering index	CRI > 90
Module luminous flux	2095 lm
Luminaire luminous flux	1425 lm
Luminaire luminous efficiency	71,2 lm/W

12 140 K4

Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	2185 lm
Luminaire luminous flux	1486 lm
Luminaire luminous efficiency	74,3 lm/W

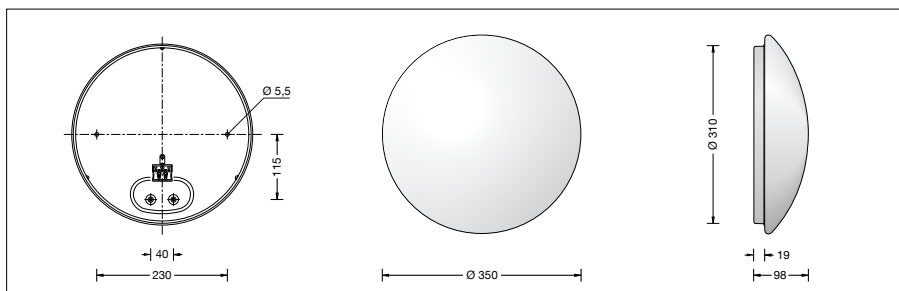

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 328,000h: L70B50

max. ambient temperature $t_a = 35$ °C
– at 177,000h: L70B50

Accessory · Trim rings

For this luminaire metal cover rings in 3 enamel surfaces are optional available. Trim rings are accessories and must be ordered separately.

Article No. 12 140

LED colour temperature optionally 2700 K, 3000 K or 4000 K
2700 K – Article number + **K2**
3000 K – Article number + **K3**
4000 K – Article number + **K4**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.

Item	Part. No
Finish enamel white	13 004
Finish enamel palladium	13 005
Finish enamel glossy silver	13 006