

BEGA**12 163 P**

Ceiling and wall luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white,
with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 150 mm
1 cable entry for through-wiring
for mains cable
Connecting terminal 2.5[□]
with plug connection
Earth conductor connection
2-pole connecting terminal for
digital control
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 5.1 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Lamp


Module connected wattage	25.2 W
Luminaire connected wattage	29.4 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a,max} = 35$ °C

12 163 P K3

Module designation	LED-0530/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	3165 lm
Luminaire luminous flux	2367 lm
Luminaire luminous efficiency	80,5 lm/W

12 163 P K4

Module designation	LED-0530/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	3280 lm
Luminaire luminous flux	2453 lm
Luminaire luminous efficiency	83,4 lm/W

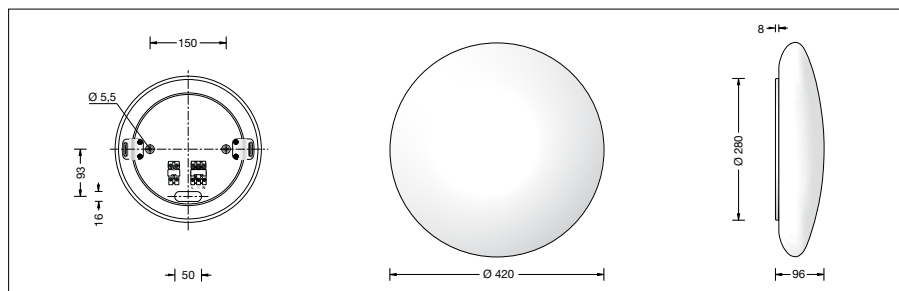

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 165,000h: L70 B50
max. ambient temperature $t_a = 35$ °C
– at 93,000h: L70 B50

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 12 163 P

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**