

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****IP 44****1166 P**

Project · Reference number

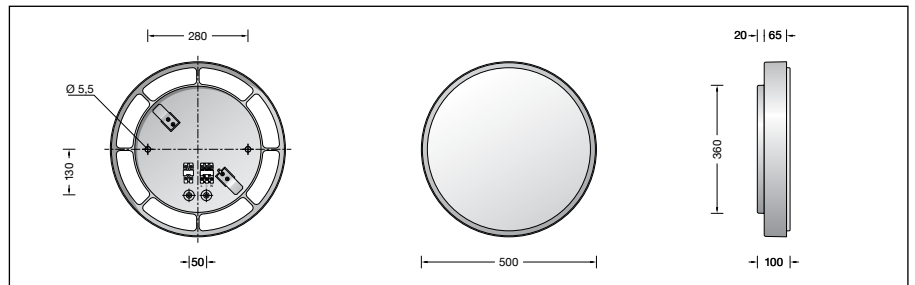
Date

Application

Ceiling and wall luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. High operating efficiency because of long maintenance intervals and high light output with low connected load.

Product description

Metal housing, finish white aluminium enamel RAL 9006
 Impact resistant synthetic diffuser, white, with sliding-bolt closure
 2 fixing holes \varnothing 5.5 mm
 280 mm spacing
 2 cable entries for through-wiring for mains cable up to \varnothing 10,5 mm max. 5 x 1.5[□]
 Plug connection
 Connecting terminal 2.5[□]
 Earth conductor connection
 2-pole connecting terminal for digital control
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DALI controllable
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
CE – Conformity mark


www.glashuette-limburg.com
**Lamp**

Module connected wattage	38.7 W
Luminaire connected wattage	43.5 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Service life criteria	50 000 h/L ₇₀

Article No. 1166P

Colour temperature 3000 K.
 Also available with 4000 K on request.
 3000 K – article number
 4000 K – article number + **K4**

1166 P

Module designation	LED-0531/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	5225 lm

1166 P K4

Module designation	LED-0531/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	5225 lm