

BEGA**12 209.3**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Enclosed and free-radiating wall luminaire made of hand-blown opal glass, with metal housing, for all lighting tasks in interior applications.

Product description

Metal luminaire housing,
finish white enamel
Hand-blown opal glass
Metal shield, chrome finish
2 mounting holes $\varnothing$ 4.5 mm
Distance apart 138 mm
2 cable entries for through-wiring for mains
cable up to $\varnothing$ 10.5 mm max. 3×1.5 [□]
Connection terminal 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V ~ 50-60 Hz
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 1.1 kg

Inrush current

Inrush current: 10 A / 100 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10 A: 60 luminaires
B 16 A: 100 luminaires
C 10 A: 120 luminaires
C 16 A: 200 luminaires

Lamp



Module connected wattage	8.4 W
Luminaire connected wattage	10.5 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 25^\circ\text{C}$

12 209.3 K3

Module designation	LED-0589/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1130 lm
Luminaire luminous flux	604 lm
Luminaire luminous efficiency	57,5 lm/W

12 209.3 K4

Module designation	LED-0589/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	1130 lm
Luminaire luminous flux	604 lm
Luminaire luminous efficiency	57,5 lm/W

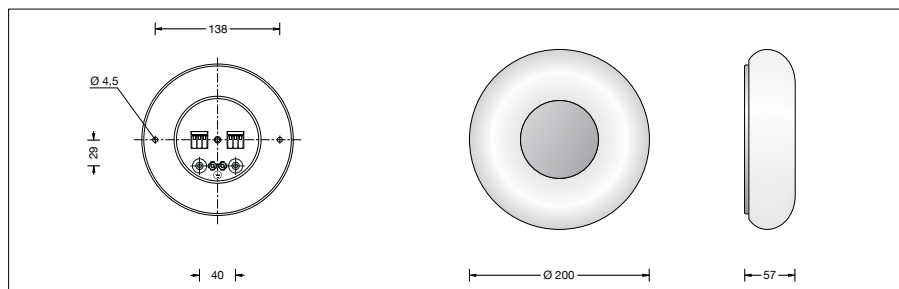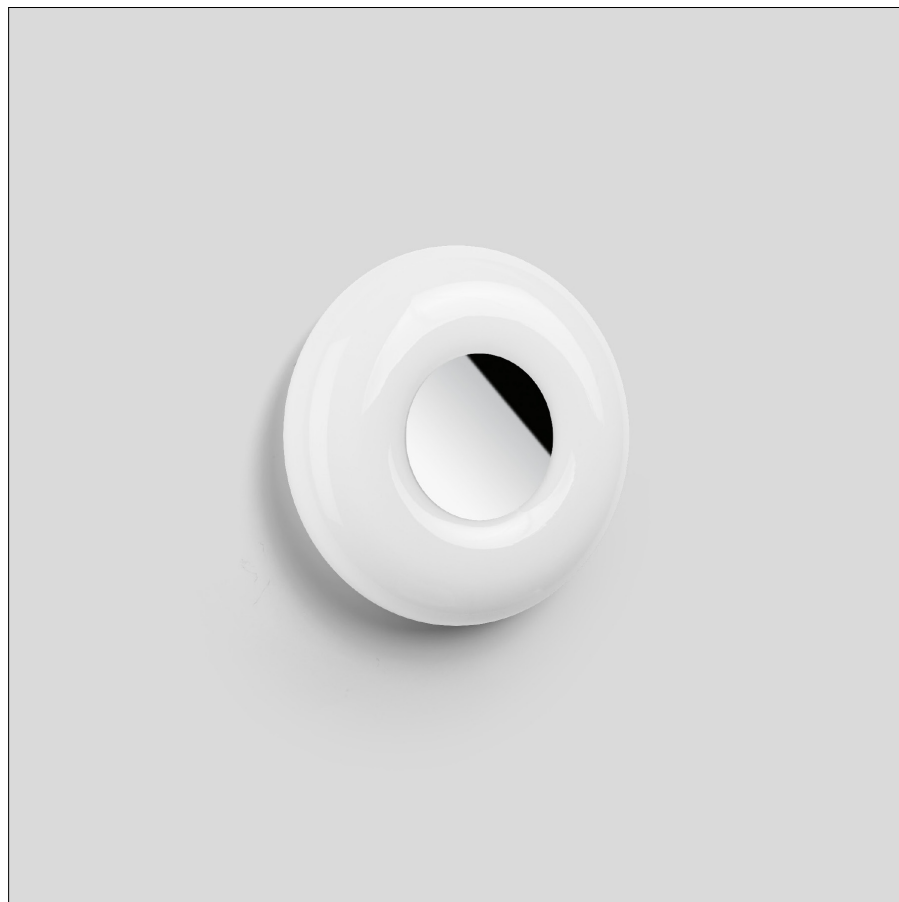

Service life of the LED

Ambient temperature $t_a = 25^\circ\text{C}$
– at 248,000 h: L70 B50

max. ambient temperature $t_a = 25^\circ\text{C}$
– at 248,000 h: L70 B50

Article No. 12 209.3

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.