

BEGA**12 210.3**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Enclosed and free-radiating wall luminaire made of hand-blown opal glass, with metal housing, for all lighting tasks in interior applications.

Product description

Metal luminaire housing,
finish white enamel
Hand-blown opal glass
Metal shield, chrome finish
2 mounting holes $\varnothing$ 4.5 mm
Distance apart 250 mm
2 cable entries for through-wiring for connection cable up to $\varnothing$ 10,5 mm max. $5 \times 1.5^{\square}$
Connection terminal $2.5^{\square}$
Earth conductor connection
2-pole connecting terminal for digital control
LED power supply unit
220-240 V $\sim$ 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable and control line
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 1.1 kg

Inrush current

Inrush current: 12 A / 24.2 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B 10A: 50 luminaires
B 16A: 50 luminaires
C 10A: 50 luminaires
C 16A: 50 luminaires

Lamp

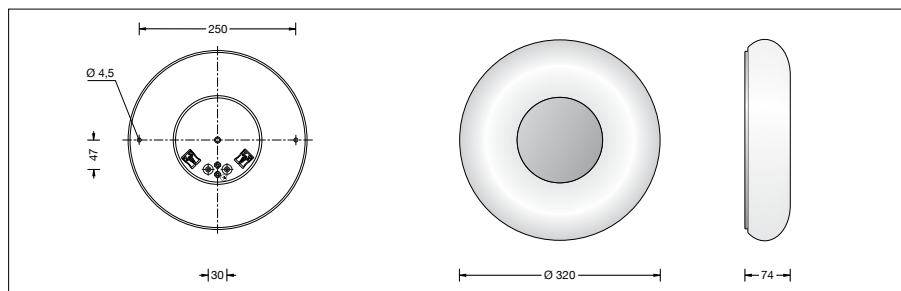
Module connected wattage 16.8 W
Luminaire connected wattage 19.6 W
Rated temperature $t_a = 25^{\circ}\text{C}$
Ambient temperature $t_{a\text{ max}} = 40^{\circ}\text{C}$

12 210.3 K3

Module designation LED-0594/830
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 2320 lm
Luminaire luminous flux 1283 lm
Luminaire luminous efficiency 65,5 lm/W

12 210.3 K4

Module designation LED-0594/840
Colour temperature 4000 K
Colour rendering index CRI > 80
Module luminous flux 2320 lm
Luminaire luminous flux 1283 lm
Luminaire luminous efficiency 65,5 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 252,000 h: L70B50

max. ambient temperature $t_a = 40^{\circ}\text{C}$
– at 104,000 h: L70B50

Article No. 12 210.3

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Finish options

- Enamel, white
- Chrome
- Enamel, velvet black

Code number **.1**
Code number **.3**
Code number **.5**