

GLASHÜTTE LIMBURG**Product data sheet****Recessed ceiling luminaire****12 234.3**

Project · Reference number

Date

Application

Recessed LED-ceiling luminaire and crystal glass inside and asymmetrical light distribution for connection to external LED power supply unit.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

For installation in suspended ceilings of 3-20 mm in interior applications.

If this luminaire should be integrated into a LCN or ZigBee controlled building management system we recommend our BEGA Control light control system.

Product description

Recessed LED luminaire without power supply unit

Luminaire made of aluminium alloy, aluminium and stainless steel

Crystal glass

Reflector surface finish pure aluminium

Cover frame with optional finish:

Metal white Reference number **.1**

Stainless steel Reference number **.2**

polished aluminium Reference number **.3**

Fixing is achieved by using two pivoting wedge-shaped claws

Required recessed opening 130 x 130 mm

Recessed depth 88 mm

1 connecting cable with strain relief

and plug connector system for

GLASHÜTTE LIMBURG power supply unit,

dimnable 1-10 V or DALI

Safety class III

Impact strength IK06

Protection against mechanical

impacts < 1 joule

CE – Conformity mark

Light technique

Recessed ceiling downlight with asymmetrical light distribution.

Half beam angle 30/30°

Luminaire data for the light planning program

DIALux for indoor lighting as well as luminaire

data in EULUMDAT and IES-format you will

find on our website

www.glashuette-limborg.com.

Lamp

Module connected wattage 14.4 W

Luminaire connected wattage 17 W

Rated temperature $t_a = 25\text{ °C}$

Ambient temperature $t_{a\text{ max}} = 25\text{ °C}$

12 234.3

Module designation LED-0586/830

Colour temperature 3000 K

Colour rendering index $R_a > 80$

Module luminous flux 2500 lm

Luminaire luminous flux 1221 lm

Luminaire luminous efficiency 71,8 lm/W

12 234.3 K4

Module designation LED-0586/840

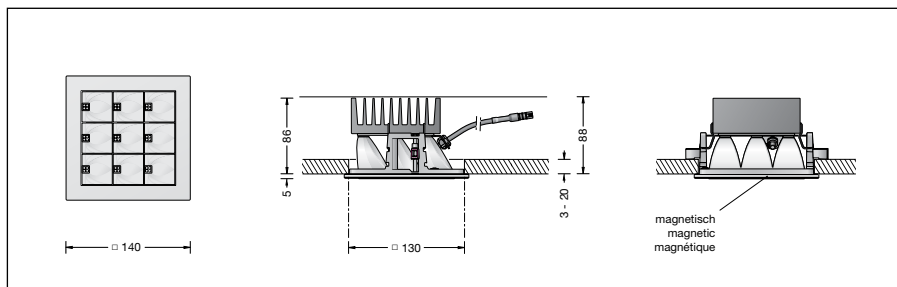
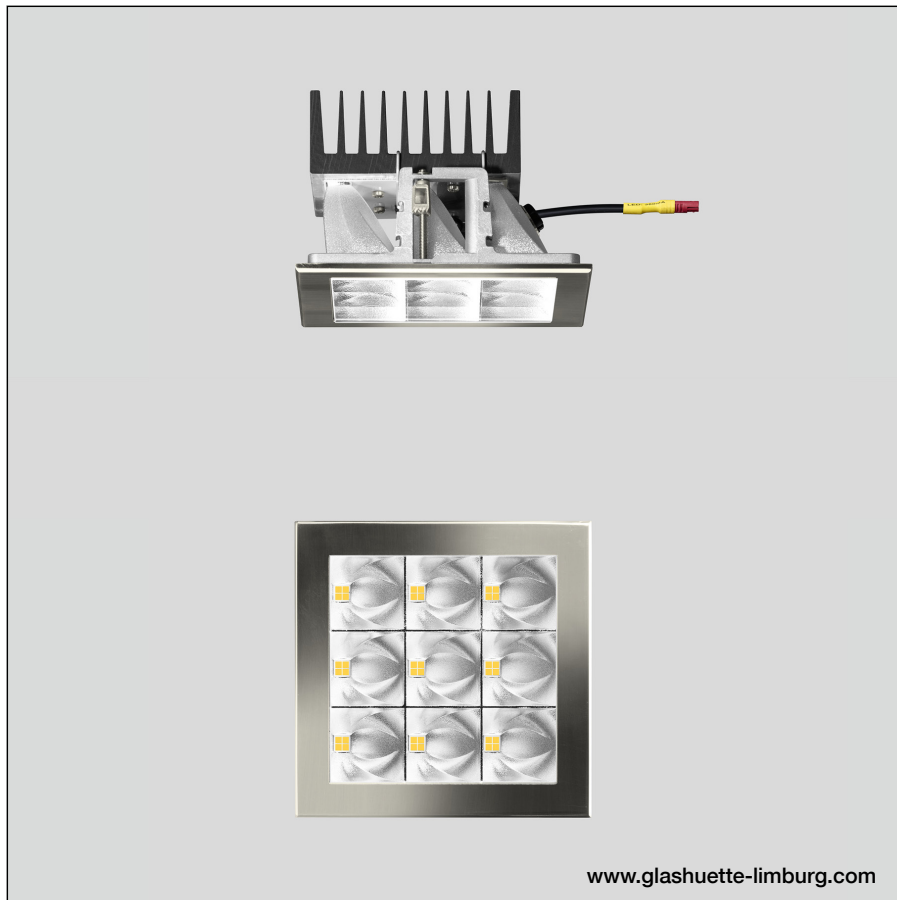
Colour temperature 4000 K

Colour rendering index $R_a > 80$

Module luminous flux 2500 lm

Luminaire luminous flux 1221 lm

Luminaire luminous efficiency 71,8 lm/W

**Lifetime of the LED**

Ambient temperature $t_a = 15\text{ °C}$

– at 50,000h: L 80 B 10

– at 192,000h: L 70 B 50

Ambient temperature $t_a = 25\text{ °C}$

– at 50,000h: L 70 B 50

– at 108,000h: L 70 B 50

max. ambient temperature $t_a = 25\text{ °C}$

– at 50,000h: L 70 B 50

– at 108,000h: L 70 B 50

Article No. 12 234.3

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**

Finish options

- Enamel, white Code number **.1**
- Stainless steel Code number **.2**
- Polished aluminium Code number **.3**

Accessories

Power supply units for LED luminaires 220-240 V · 50/60 Hz with strain relief and plug connector system.

13 044 Power supply unit dimmable 1-10 V

13 045 Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.