

BEGA**22 174**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

LED wall luminaire for orientating lighting tasks.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
Matt safety glass
Reflector made of pure anodised aluminium
Silicone gasket
2 mounting holes \varnothing 4.5 mm
Distance apart 268 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connection terminal 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK10
Protection against mechanical
impacts < 20 joule
 – Safety mark
CE – Conformity mark
Weight: 1.5 kg

Inrush current

Inrush current: 7 A / 112 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B10A: 38 luminaires
B16A: 61 luminaires
C10A: 64 luminaires
C16A: 102 luminaires

Lamp

Module connected wattage	3.9 W
Luminaire connected wattage	5 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 45$ °C


On request we can offer you modifications for
environments with higher temperatures as a
customized product.

22 174 K3

Module designation	LED-0583/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	590 lm
Luminaire luminous flux	336 lm
Luminaire luminous efficiency	67,2 lm/W

22 174 K4

Module designation	LED-0583/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	590 lm
Luminaire luminous flux	336 lm
Luminaire luminous efficiency	67,2 lm/W

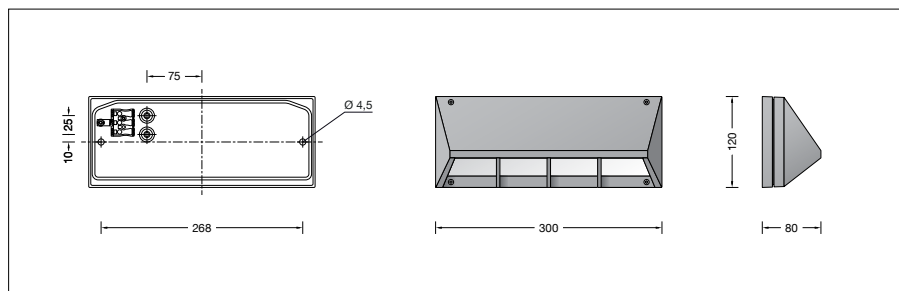

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C
LED psu: > 50,000 h
LED module: > 200,000 h (L80 B50)
100,000 h (L90 B50)

Ambient temperature $t_{a \max} = 45$ °C (100 %)

LED psu: 50,000 h
LED module: 191,000 h (L80 B50)
100,000 h (L90 B50)

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 22 174

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

