



Project · Reference number

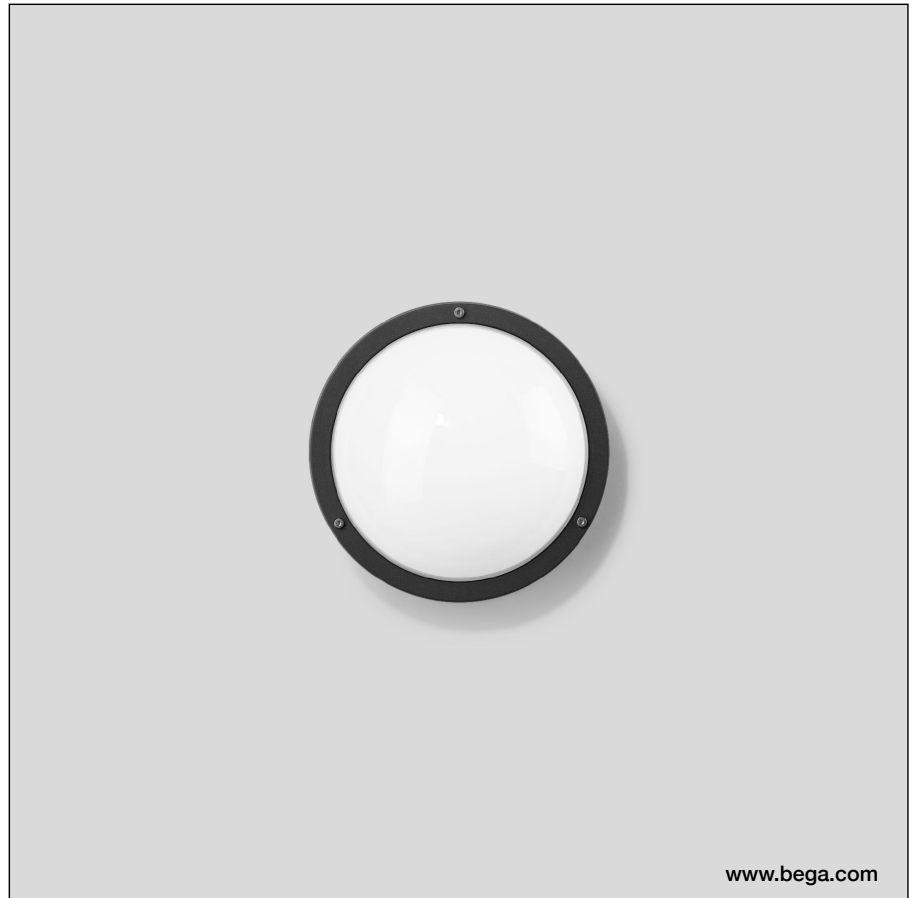
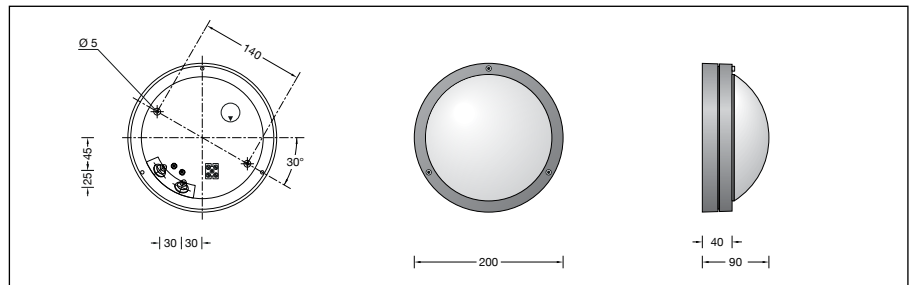
Date

Application

Unshielded luminaire with high protection class for installation under ceilings and on walls.
A luminaire made of die cast aluminium and impact resistant synthetic diffuser made of polycarbonate.
For interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel
Impact resistant synthetic diffuser, polycarbonate white with optical structure
Silicone gasket
Reflector made of pure anodised aluminium
2 mounting holes \varnothing 5 mm
Distance apart 140 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
Connection terminal 2.5[□]
Earth conductor connection
Lampholder E 14
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK10
Protection against mechanical impacts < 20 joule
  – Safety mark
CE – Conformity mark
Weight: 0.8 kg

www.bega.com**Lamp**

Luminaire with lampholder E 14
Lamp output max. 60 W

Article No. 22 501

Colour graphite or silver
graphite – article number
silver – article number + **A**

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K**13 554** LED 5 W · 470 lm · 2700 K
dimmable**13 594** LED 4 W · 470 lm · 3000 K**13 596** LED 5 W · 470 lm · 3000 K
dimmable

Radio-controlled version (Zigbee 3.0):

13 558 LED 2,3 W · 470 lm · 2700 K
dimmable**13 559** LED 5,8 W · 470 lm · 2700-6500 K
dimmable · tunable white

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.