

**BEGA****22 503**

Ceiling and wall luminaire



Project · Reference number


Date

## Product data sheet

### Application

Unshielded luminaire with high protection class for installation under ceilings and on walls. A luminaire made of die cast aluminium and impact resistant synthetic diffuser made of polycarbonate. For interior and exterior lighting applications.

### Product description

Luminaire made of aluminium alloy and stainless steel  
 BEGA Unidure® coating technology  
 Impact resistant synthetic diffuser, polycarbonate white with optical structure  
 2 mounting holes  $\varnothing$  5.3 mm  
 Distance apart 260 mm  
 2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm  
 Connection terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 Lampholder E 27  
 Safety class I  
 Protection class IP 65  
 Dust-tight and protection against water jets  
 Impact strength IK10  
 Protection against mechanical impacts < 20 joule  
 – Safety mark  
 CE – Conformity mark  
 Weight: 2.6 kg

### Lamps

Luminaire with lampholder E 27  
 Lamp output max. 2 × 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
 dimmable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
 dimmable

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K


Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
 dimmable

**13556** LED 9 W · 805 lm · 2700-6500 K  
 dimmable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
 dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

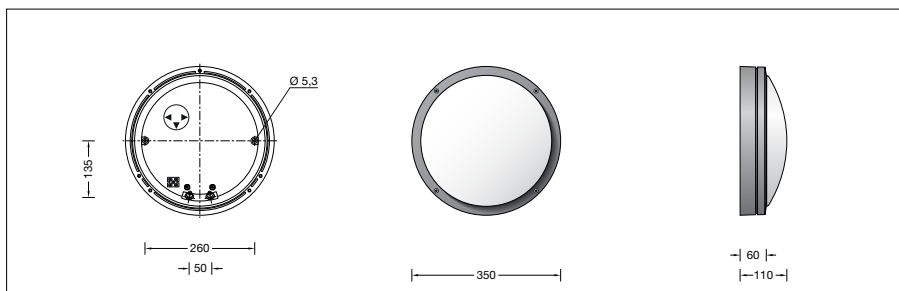

### Article No. 22 503

Colour graphite or silver  
 graphite – article number  
 silver – article number + **A**