

BEGA**22 505**

Ceiling and wall luminaire



Project · Reference number



Date

Product data sheet

Application



Unshielded luminaire with high protection class for installation under ceilings and on walls. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy and stainless steel
 Crystal glass with optical structure
 Silicone gasket
 Reflector made of pure anodised aluminium
 2 mounting holes \varnothing 5 mm
 Distance apart 140 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 14
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK06
 Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
 Weight: 1.1 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

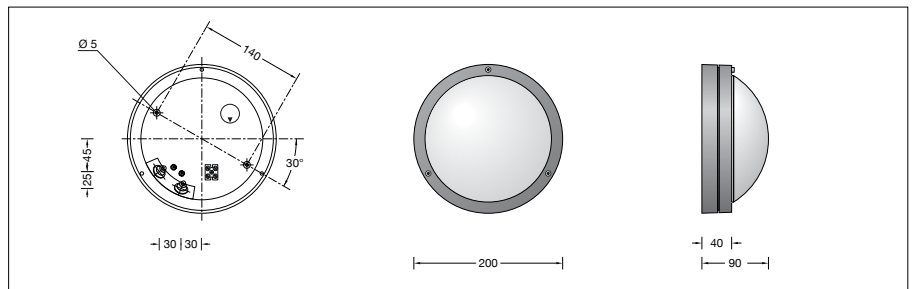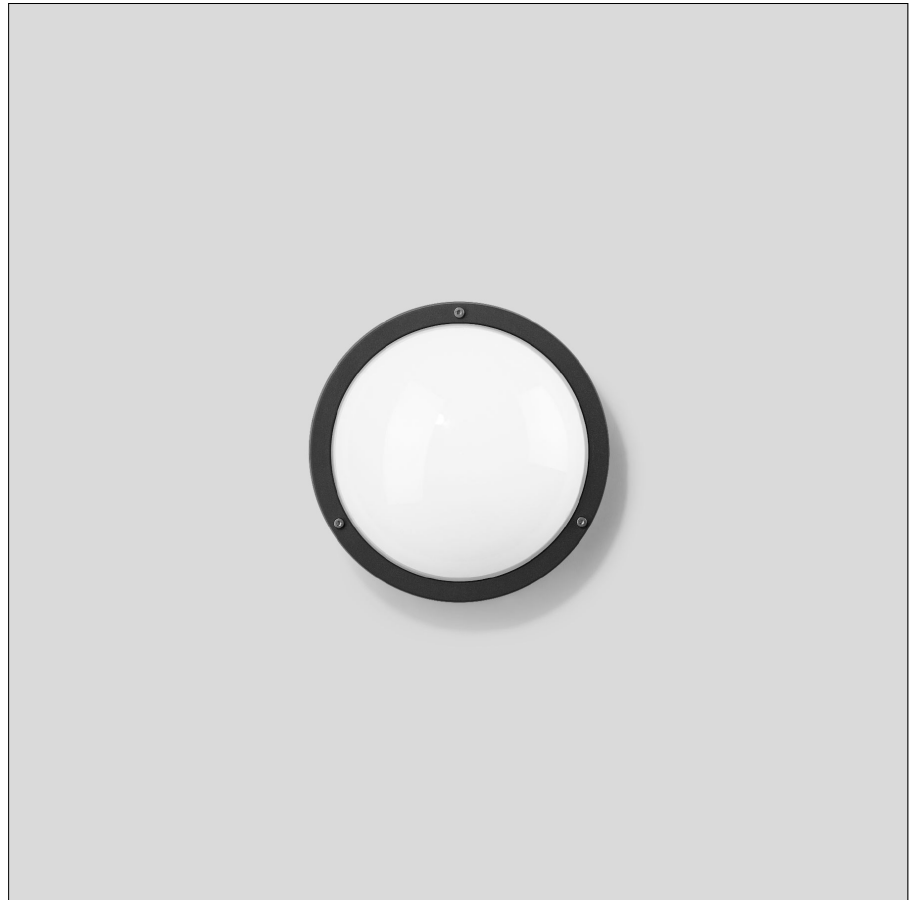

Lamp

Luminaire with lampholder E 14
 Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
 dimmable

13 594 LED 4 W · 470 lm · 3000 K

13 596 LED 5 W · 470 lm · 3000 K
 dimmable

Radio-controlled version (Zigbee 3.0):

13 558 LED 2,3 W · 470 lm · 2700 K
 dimmable

13 559 LED 5,8 W · 470 lm · 2700-6500 K
 dimmable · tunable white

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Article No. 22 505

Colour graphite or silver
 graphite – article number
 silver – article number + **A**