

BEGA**22 506**

Ceiling and wall luminaire



Project · Reference number



Date

Product data sheet

Application

Unshielded luminaire with high protection class for installation under ceilings and on walls. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy and stainless steel
 Crystal glass with optical structure
 Silicone gasket
 Reflector made of pure anodised aluminium
 2 mounting holes \varnothing 5 mm
 Distance apart 195 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK06
 Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
 Weight: 1.9 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Luminaire with lampholder E 27
 Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13 510 LED 7 W · 805 lm · 2700 K

13 548 LED 7 W · 805 lm · 2700 K
 dimmable

13 584 LED 7 W · 805 lm · 3000 K

13 586 LED 7 W · 805 lm · 3000 K
 dimmable

13 512 LED 8 W · 1055 lm · 2700 K

13 588 LED 8 W · 1055 lm · 3000 K

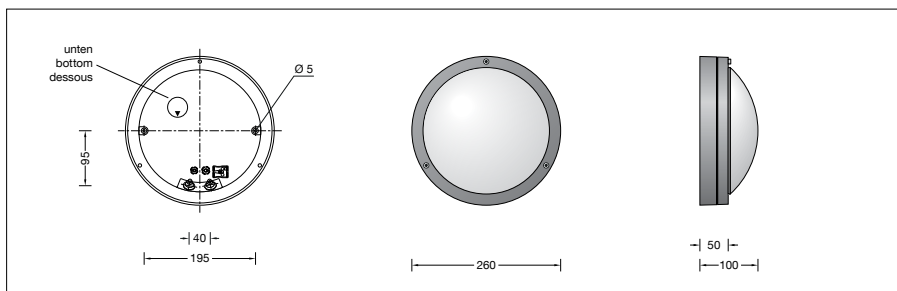
Radio-controlled version (Zigbee 3.0):

13 555 LED 9 W · 805 lm · 2700 K
 dimmable

13 556 LED 9 W · 805 lm · 2700-6500 K
 dimmable · tunable white

13 557 LED 9.5 W · 805 lm · 2700-6500 K
 dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



Article No. 22 506

Colour graphite or silver
 graphite – article number
 silver – article number + **A**