

BEGA**22 507**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire with high protection class for installation under ceilings and on walls. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 White crystal glass with optical structure
 Silicone gasket
 2 mounting holes \varnothing 5.3 mm
 Distance apart 260 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK04
 Protection against mechanical impacts < 0.5 joule
 – Safety mark
 – Conformity mark
 Weight: 3.5 kg

Lamps

Luminaire with lampholder E 27
 Lamp output max. 2 × 60 W



For this luminaire we recommend the following BEGA LED lamps:

- 13 510** LED 7 W · 805 lm · 2700 K
- 13 548** LED 7 W · 805 lm · 2700 K
dimnable
- 13 584** LED 7 W · 805 lm · 3000 K
- 13 586** LED 7 W · 805 lm · 3000 K
dimnable
- 13 512** LED 8 W · 1055 lm · 2700 K
- 13 588** LED 8 W · 1055 lm · 3000 K

Radio-controlled version (Zigbee 3.0):

- 13 555** LED 9 W · 805 lm · 2700 K
dimnable
- 13 556** LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white
- 13 557** LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

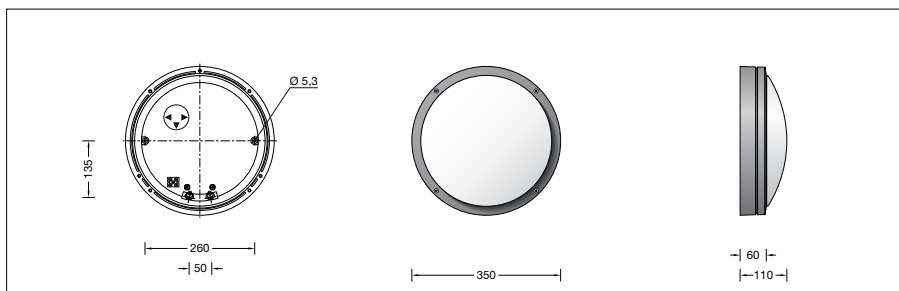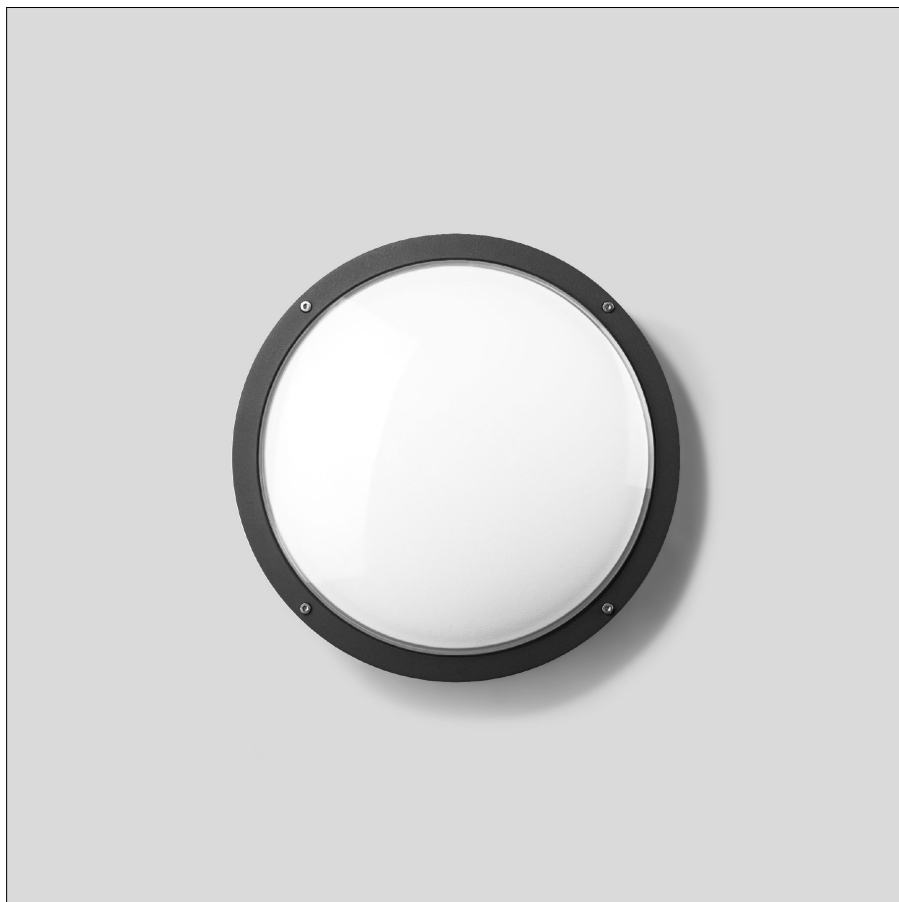

Article No. 22 507

Colour graphite or silver
 graphite – article number
 silver – article number + **A**