

BEGA**22 679**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet



Application

Unshielded luminaire with protective guard and high protection class for installation under ceilings and on walls.

A luminaire made of die cast aluminium and impact resistant synthetic diffuser made of polycarbonate.

For interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel
 BEGA Unidure® coating technology
 Impact resistant synthetic diffuser, polycarbonate white with optical structure
 Silicone gasket
 2 mounting holes \varnothing 4.3 mm
 Distance apart 150 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Lampholder terminal 2.5[□]
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK10
 Protection against mechanical impacts < 20 joule
 – Safety mark
 – Conformity mark
 Weight: 1.1 kg

Lamp



Luminaire with lampholder E 27
 Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K
 dimmable

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

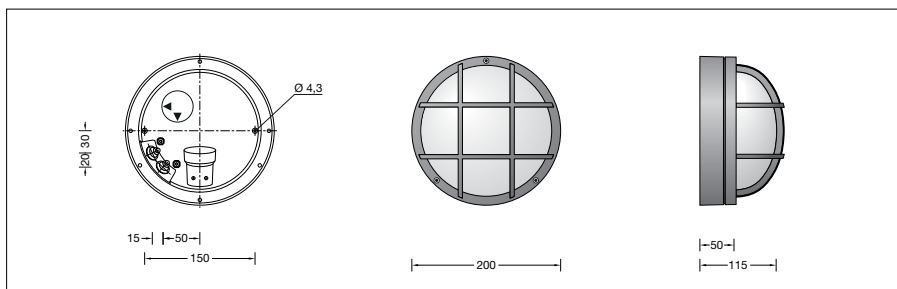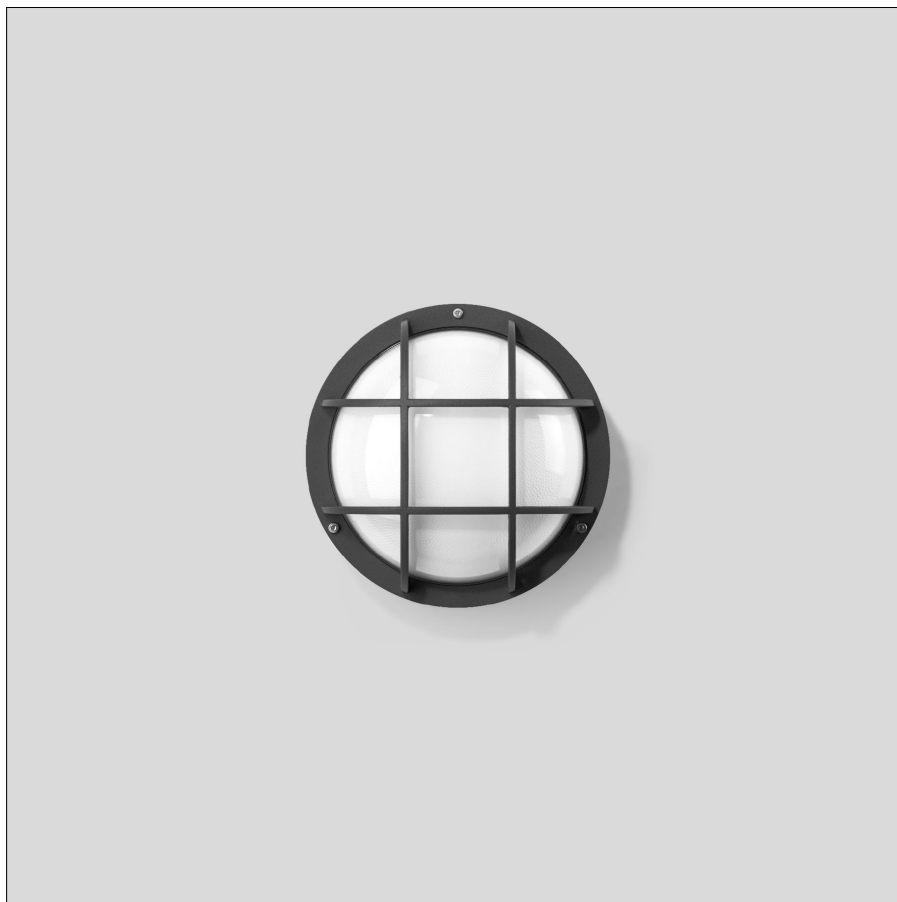

Article No. 22 679

Colour graphite or silver
 graphite – article number
 silver – article number + **A**