

BEGA**22 875**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire with protective guard and high protection class for installation under ceilings and on walls.

A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

For interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel

Crystal glass with optical structure

Silicone gasket

2 mounting holes \varnothing 5.2 mm

Distance apart 210 mm

2 cable entries for through-wiring of mains

supply cable \varnothing 7-10.5 mm

Lampholder terminal 2.5[□]

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK05

Protection against mechanical

impacts < 0.7 joule

– Safety mark

CE – Conformity mark

Weight: 2.1 kg

Lamp

Luminaire with lampholder E 27

Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13588 LED 8 W · 1055 lm · 3000 K


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimnable

13556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

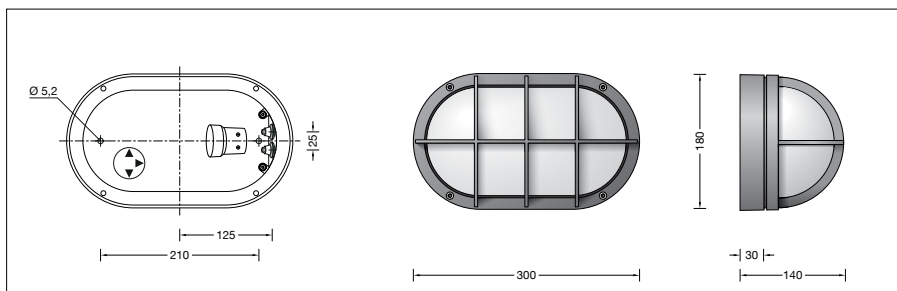

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 22875

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

