

**BEGA****22 892**

Ceiling and wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Unshielded luminaire with protective guard and high protection class for installation under ceilings and on walls.

A luminaire made of die cast aluminium and impact resistant synthetic diffuser made of polycarbonate.

For interior and exterior lighting applications.

### Product description

Luminaire made of aluminium alloy

and stainless steel

BEGA Unidure® coating technology

Impact resistant synthetic diffuser,

polycarbonate white with optical structure

Silicone gasket

2 mounting holes  $\varnothing$  4.5 mm

Distance apart 195 mm

2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm

Connection terminal 2.5<sup>□</sup>

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK10

Protection against mechanical

impacts < 20 joule

– Safety mark

– Conformity mark

Weight: 1.9 kg

### Lamp

Luminaire with lampholder E 27

Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimnable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimnable

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K



Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
dimnable

**13556** LED 9 W · 805 lm · 2700-6500 K  
dimnable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

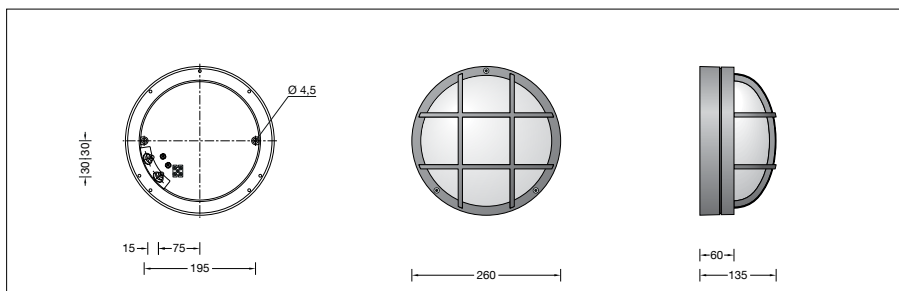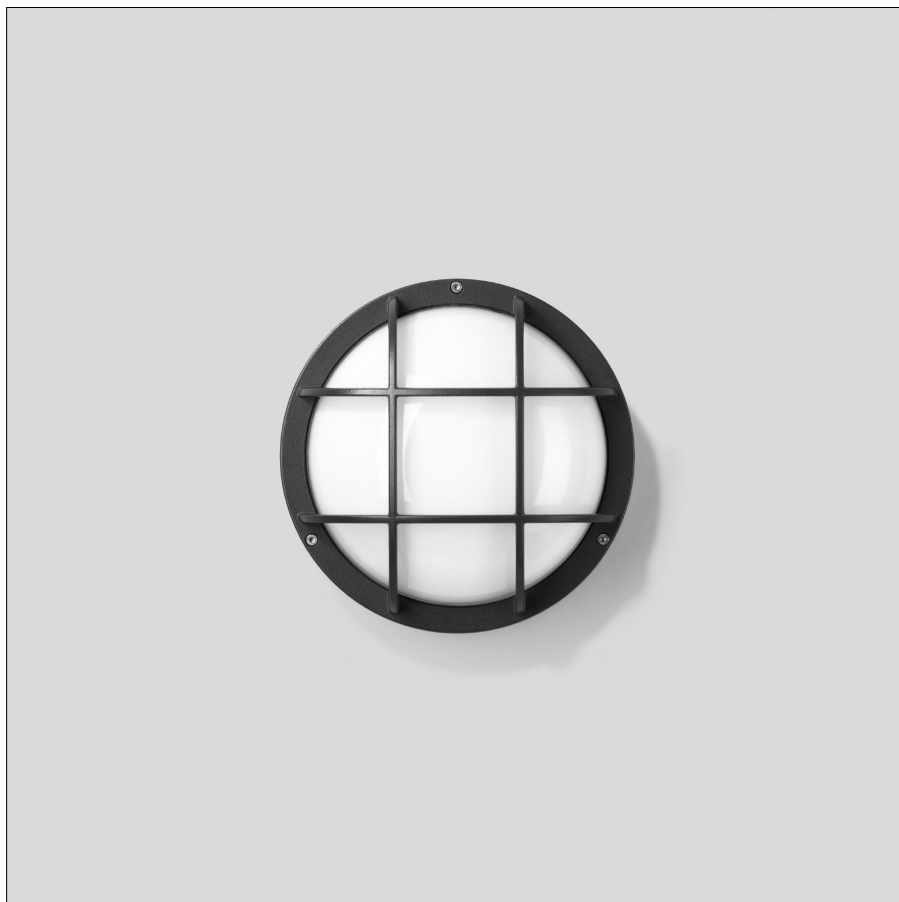

### Article No. 22 892

Colour graphite or silver

graphite – article number

silver – article number + **A**