

BEGA**23 013.3**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

LED wall luminaire · indoor luminaire with integrated power supply unit for many lighting tasks in interior applications.

The light emits upwards and downwards.

Product description

Die-cast zinc luminaire housing, finish chrome

Crystal glass, inside white

1 cable entry for mains supply cable

up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$

Connection terminal 2.5^{\square}

Earth conductor connection

LED power supply unit

220-240 V \sim 0/50-60 Hz

DC 176-264 V

DC Start \geq 198 V

Safety class I

– Safety mark

CE – Conformity mark

Weight: 0.7 kg

Inrush current

Inrush current: 20 A / 170 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 31 luminaires

B16A: 50 luminaires

C10A: 52 luminaires

C16A: 85 luminaires

Lamp

Module connected wattage 4.2 W

Luminaire connected wattage 5.7 W

Rated temperature $t_a = 25^{\circ}\text{C}$

Ambient temperature $t_{a\text{max}} = 35^{\circ}\text{C}$

23 013.3 K3

Module designation 2x LED-0234/930

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 510 lm

Luminaire luminous flux 220 lm

Luminaire luminous efficiency 38,6 lm/W

23 013.3 K4

Module designation 2x LED-0234/940

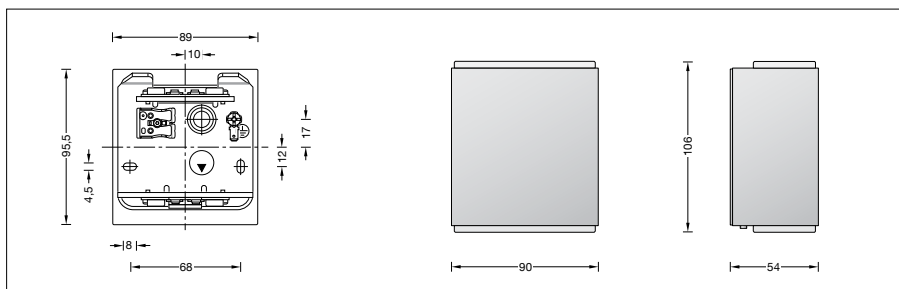
Colour temperature 4000 K

Colour rendering index CRI > 90

Module luminous flux 530 lm

Luminaire luminous flux 229 lm

Luminaire luminous efficiency 40,2 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25^{\circ}\text{C}$

– at 445,000h: L70B50

max. ambient temperature $t_a = 35^{\circ}\text{C}$

– at 238,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 23 013.3

LED colour temperature optionally 3000 K or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**