

BEGA**23 263.1**

Wall luminaire for indoor use



Project · Reference number



Date

Product data sheet

Application

Wall luminaire · indoor luminaire, inside white and die-cast zinc luminaire housing.

Product description

Die-cast zinc luminaire housing,
finish white enamel
Crystal glass, inside white
2 elongated fixing holes
Width 5 mm · 59,5 mm spacing
1 cable entry for mains supply cable
up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminals 2.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
 – Safety mark
 – Conformity mark
Weight: 0.8 kg

Inrush current

Inrush current: 6 A / 102 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 60 luminaires
B16A: 96 luminaires
C10A: 100 luminaires
C16A: 161 luminaires

Lamp


Module connected wattage 1.9 W
Luminaire connected wattage 2.5 W
Rated temperature $t_a = 25^{\circ}\text{C}$
Ambient temperature $t_{a \text{ max}} = 55^{\circ}\text{C}$

23 263.1 K3

Module designation LED-0264/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 310 lm
Luminaire luminous flux 83 lm
Luminaire luminous efficiency 33,2 lm/W

23 263.1 K4

Module designation LED-0264/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 320 lm
Luminaire luminous flux 85 lm
Luminaire luminous efficiency 34 lm/W

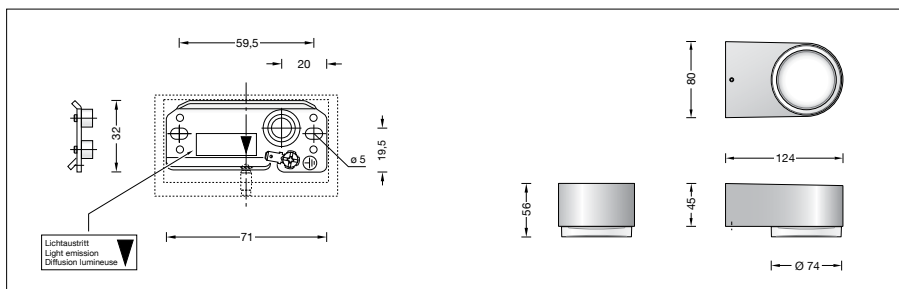

Service life of the LED

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at > 500,000h: L70B50

max. ambient temperature $t_a = 55^{\circ}\text{C}$
– at 201,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 23 263.1

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**