

**BEGA****23 263.2**

Wall luminaire for indoor use



Project · Reference number



Date

## Product data sheet

**Application**

Wall luminaire · indoor luminaire, inside white and die-cast zinc luminaire housing.

**Product description**

Die-cast zinc luminaire housing,  
finish white enamel  
Crystal glass, inside white  
2 elongated fixing holes  
Width 5 mm · 59,5 mm spacing  
1 cable entry for mains supply cable  
up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
Connecting terminals  $2.5^{\square}$   
Earth conductor connection  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-264 V  
Safety class I  
 – Safety mark  
 – Conformity mark  
Weight: 0.8 kg

**Inrush current**

Inrush current: 6 A / 102  $\mu$ s  
Maximum number of luminaires of this type per miniature circuit breaker:  
B10A: 60 luminaires  
B16A: 96 luminaires  
C10A: 100 luminaires  
C16A: 161 luminaires

**Lamp**

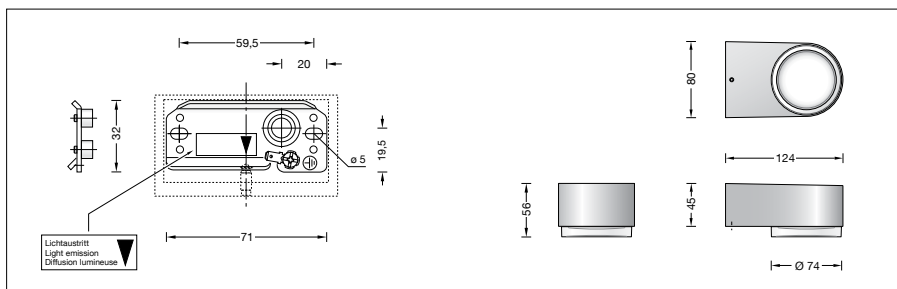
Module connected wattage 1.9 W  
Luminaire connected wattage 2.5 W  
Rated temperature  $t_a = 25^{\circ}\text{C}$   
Ambient temperature  $t_{a \text{ max}} = 55^{\circ}\text{C}$

**23 263.2 K3**

Module designation LED-0264/930  
Colour temperature 3000 K  
Colour rendering index CRI > 90  
Module luminous flux 310 lm  
Luminaire luminous flux 83 lm  
Luminaire luminous efficiency 33,2 lm/W

**23 263.2 K4**

Module designation LED-0264/940  
Colour temperature 4000 K  
Colour rendering index CRI > 90  
Module luminous flux 320 lm  
Luminaire luminous flux 85 lm  
Luminaire luminous efficiency 34 lm/W

**Service life of the LED**

Ambient temperature  $t_a = 25^{\circ}\text{C}$   
– at > 500,000h: L70B50  
max. ambient temperature  $t_a = 55^{\circ}\text{C}$   
– at 201,000h: L70B50

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Article No. 23 263.2**

LED colour temperature optionally 3000 K or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**