

BEGA**23 264.3**

Wall luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

Wall luminaire · indoor luminaire, inside white and die-cast zinc luminaire housing.

Product description

Die-cast zinc luminaire housing,
finish chrome
Crystal glass, inside white
2 elongated fixing holes
Width 5 mm · 76,5 mm spacing
1 cable entry for mains supply cable
up to \varnothing 10.5 mm max. 3 x 1.5[□]
Connecting terminal 2.5[□]
with plug connection
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 1.2 kg

Inrush current

Inrush current: 7 A / 112 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 38 luminaires
B16A: 61 luminaires
C10A: 64 luminaires
C16A: 102 luminaires

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp


Module connected wattage	3.9 W
Luminaire connected wattage	5 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 45$ °C

23 264.3 K3

Module designation	LED-0265/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	610 lm
Luminaire luminous flux	167 lm
Luminaire luminous efficiency	33,4 lm/W

23 264.3 K4

Module designation	LED-0265/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	630 lm
Luminaire luminous flux	173 lm
Luminaire luminous efficiency	34,6 lm/W

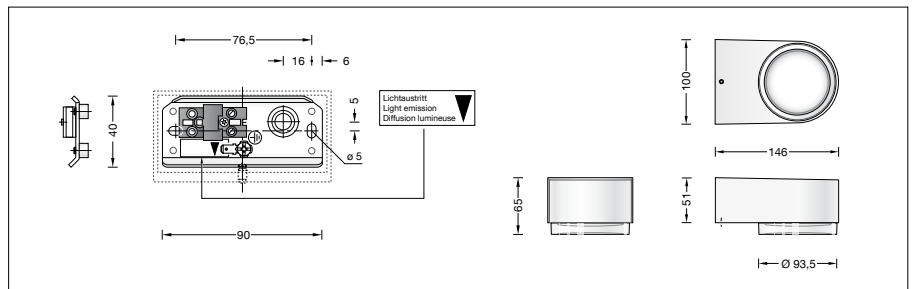

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at > 500,000h: L70B50

max. ambient temperature $t_a = 45$ °C
– at 262,000h: L70B50

Article No. 23 264.3

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**