

**BEGA****23 410 P**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Ceiling and wall luminaire · indoor luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

### Product description

Metal housing,  
finish white enamel  
Impact resistant synthetic diffuser, white,  
with sliding-bolt closure  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 155 mm  
1 cable entry for through-wiring  
for mains cable  
Connecting terminal 2.5<sup>□</sup>  
with plug connection  
Earth conductor connection  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-280 V  
Safety class I  
 – Safety mark  
**CE** – Conformity mark  
Weight: 2.5 kg

### Inrush current

Inrush current: 20 A / 80  $\mu$ s  
Maximum number of luminaires of this  
type per miniature circuit breaker:  
B 10A: 35 luminaires  
B 16A: 56 luminaires  
C 10A: 58 luminaires  
C 16A: 94 luminaires

### Lamp


Module connected wattage	11.9 W
Luminaire connected wattage	13.6 W
Rated temperature	$t_a = 25$ °C
Service life criteria	50 000 h / L <sub>70</sub>

### 23 410 P K3

Module designation	LED-0529/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1515 lm
Luminaire luminous flux	1132 lm
Luminaire luminous efficiency	83,2 lm/W

### 23 410 P K4

Module designation	LED-0529/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	1570 lm
Luminaire luminous flux	1173 lm
Luminaire luminous efficiency	86,2 lm/W

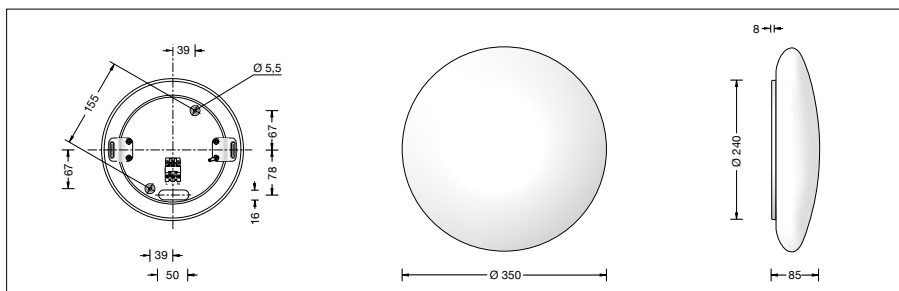

### Article No. 23 410 P

LED colour temperature optionally 3000 K  
or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**