

Project · Reference number

Date

Product data sheet**Application**

LED wall luminaire with shielded light.
Light emission 90° / 15°.
Fully glare free light for lighting wall surfaces
and for interior or exterior lighting design.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
Safety glass
Optical silicone lens
Light sector 90° / 15°
Mounting plate with
4 mounting holes \varnothing 4.5 mm
Distance apart 86 x 86 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-12 mm,
max. 5G 1.5[□]
Connecting terminal 2.5[□]
with plug connection
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-276 V
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical
impacts < 1 joule
CE – Conformity mark
Weight: 1.4 kg

Inrush current

Inrush current: 4 A / 30 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 50 luminaires
B 16A: 50 luminaires
C 10A: 50 luminaires
C 16A: 50 luminaires

Lamp

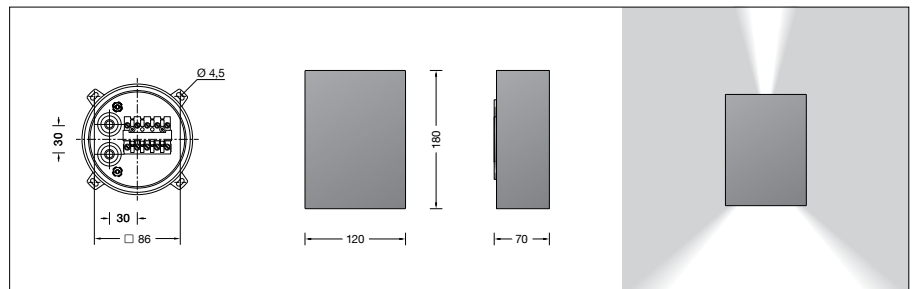
Module connected wattage 7 W
Luminaire connected wattage 9 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 55$ °C

24 088 K3

Module designation LED-0886/830 + LED-0887/830
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 1020 lm
Luminaire luminous flux 294 lm
Luminaire luminous efficiency 32,7 lm/W

24 088 K4

Module designation LED-0886/840 + LED-0887/840
Colour temperature 4000 K
Colour rendering index CRI > 80
Module luminous flux 1085 lm
Luminaire luminous flux 313 lm
Luminaire luminous efficiency 34,8 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C
– at 500,000 h: L70 B50
max. ambient temperature $t_a = 55$ °C
– at 270,000 h: L70 B50

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 24 088

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**
Colour optionally graphite, white or silver
Graphite – Article number
White – Article number + **W**
Silver – Article number + **A**

Light distribution