

Project · Reference number

Date

Application

Shielded LED luminaire for installation in walls.
For indicating danger points and traffic areas.
The used LED technique offers durability
and optimal light output with low power
consumption at the same time.

Product description

Luminaire made of aluminium alloy, aluminium
and stainless steel
White safety glass
Silicone gasket
Ceiling aperture \varnothing 120 mm
Recessed depth required 110 mm
Fixing is achieved by using two adjustable
wedge-shaped claws, European patent
EP 0 686 806
2 cable entries for through-wiring of mains
supply cable \varnothing 7 - 10,5 mm,
max. 3 G 1.5[□]
Connecting terminal 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Luminaire is suitable for direct installation in
heat-insulating material
CE – Conformity mark

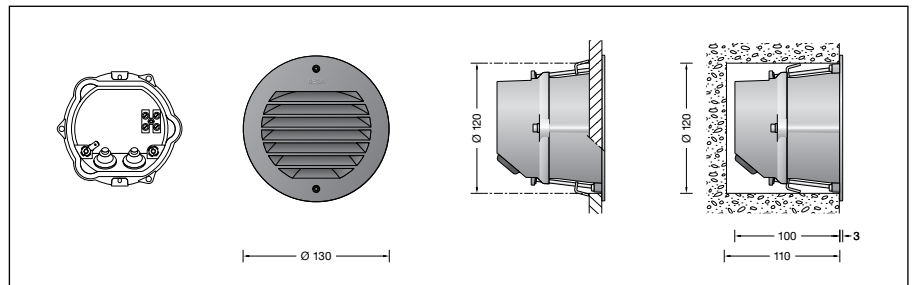
Accessories

10781 Installation housing
10081 Plaster frame

A separate instructions for use can be provided
upon request.



www.bega.com

**Lamp**

Module connected wattage	1.9 W
Luminaire connected wattage	3.8 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a, \text{max}} = 35\text{ °C}$
Service life criteria	50 000 h/L ₇₀

24 101

Module designation	LED-0625/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	360 lm

24 101 K4

Module designation	LED-0625/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	380 lm

Article No. 24 101

Colour temperature 3000 K.
Also available with 4000 K on request.
3000 K – article number
4000 K – article number + **K4**
Colour graphite or silver
graphite – article number
silver – article number + **A**