

BEGA**24 115**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded LED ceiling and wall luminaire with high protection class.
For a variety of interior and exterior lighting applications.
The luminaire can be installed in any burning position.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
BEGA Unidure® coating technology
White synthetic diffuser
2 elongated fixing holes
Width 7 mm · 350 mm spacing
Connection box with 2 cable entries for through-wiring of the mains supply cable from \varnothing 5-13 mm, max. $5 \times 2,5^{\square}$
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
DALI controllable
A basic isolation exists between power cable and control line
BEGA Thermal Switch®
Temporary thermal shutdown to protect temperature-sensitive components
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
Weight: 3.4 kg

Lamp

Module connected wattage	11.1 W
Luminaire connected wattage	14.5 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 45^{\circ}\text{C}$



On request we can offer you modifications for environments with higher temperatures as a customized product.

24 115 K3

Module designation	2x LED-0894/830 + LED-0900/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2320 lm
Luminaire luminous flux	1847 lm
Luminaire luminous efficiency	127,4 lm/W

24 115 K4

Module designation	2x LED-0894/840 + LED-0900/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2385 lm
Luminaire luminous flux	1899 lm
Luminaire luminous efficiency	131 lm/W

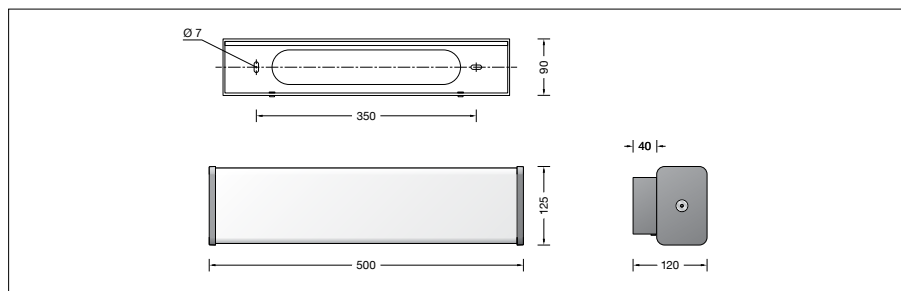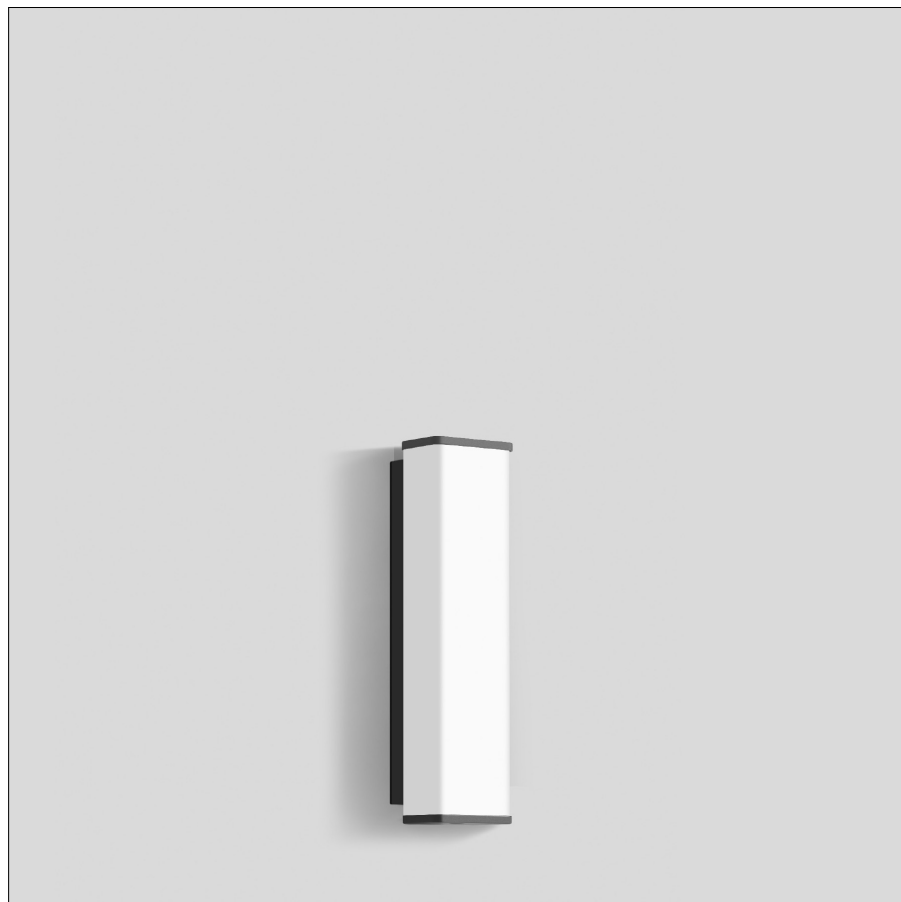

Service life · Ambient temperature

Rated temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L80 B50) 100,000 h (L90 B50)

Ambient temperature $t_{a\text{max}} = 45^{\circ}\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	164,000 h (L80 B50)

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Inrush current

Inrush current: 5 A / 50 μs
Maximum number of luminaires of this type per miniature circuit breaker:

B 10 A:	31 luminaires
B 16 A:	50 luminaires
C 10 A:	52 luminaires
C 16 A:	85 luminaires

Article No. 24 115

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Light distribution

