

**BEGA****24 196**

Ceiling and wall luminaire

IP 65

Project · Reference number

Date

**Product data sheet****Application**

Unshielded ceiling and wall luminaire with high protection class.

For a variety of interior and exterior lighting applications.

**Product description**

Luminaire made of aluminium alloy and stainless steel

BEGA Unidure® coating technology

Colour white

Opal glass

Silicone gasket

2 mounting holes  $\varnothing$  5.5 mm

Distance apart 190 mm

2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm

Lampholder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK05

Protection against mechanical

impacts < 0.7 joule

CE – Conformity mark

Weight: 1.4 kg

**Lamp**

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimmmable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimmmable

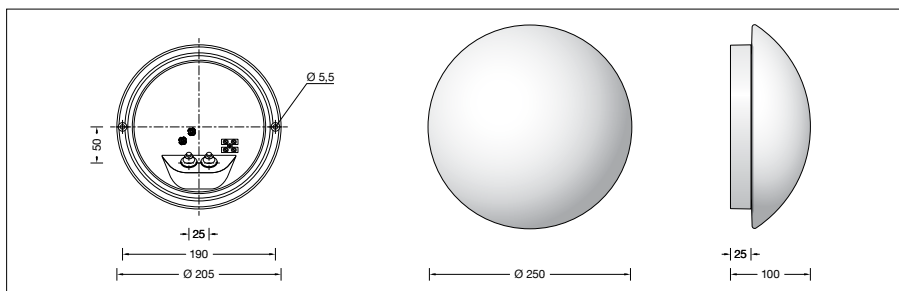
Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
dimmmable

**13556** LED 9 W · 805 lm · 2700-6500 K  
dimmmable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Light distribution**