


**BEGA****24 295**

Recessed ceiling downlight



Project · Reference number

Date

## Product data sheet

### Application

LED recessed ceiling downlight with external DALI controllable power supply unit for installation into concrete ceilings or suspended ceilings both indoors and out. With symmetrical wide beam light distribution.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
 Cover ring stainless steel  
 Clear safety glass  
 Optical silicone lens · BEGA Hybrid Optics®  
 Reflector surface made of pure aluminium  
 Luminaire housing with 2 fixing claws and guide screws  
 Recessed opening  $\varnothing$  160 mm  
 Recessed depth required 100 mm  
 The external connection housing is made of glass fibre reinforced synthetic material (polyamide)  
 220-240 V  $\sim$  0/50-60 Hz  
 2 screw cable glands with strain relief for through-wiring power connecting cable  $\varnothing$  4–10 mm, max. 5 x 1.5<sup>□</sup>  
 Connecting terminals 2.5<sup>□</sup>  
 0,7 m connection cable between the luminaire and the power supply unit.  
 BEGA Thermal Control®  
 Temporary thermal regulation to protect temperature-sensitive components without switching off the luminaire  
 Safety class II   
 Protection class IP 65  
 Dust-tight and protection against water jets  
 Impact strength IK06  
 Protection against mechanical impacts < 1 joule  
 – Safety mark  
 – Conformity mark  
 Weight: 1.5 kg

### Lamp

Module connected wattage	24.1 W
Luminaire connected wattage	28 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a, \text{max}} = 25^\circ\text{C}$

On request we can offer you modifications for environments with higher temperatures as a customized product.



### 24 295 K3

Module designation	LED-0800/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	3910 lm
Luminaire luminous flux	2916 lm
Luminaire luminous efficiency	104,1 lm/W

### 24 295 K4

Module designation	LED-0800/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	4010 lm
Luminaire luminous flux	2991 lm
Luminaire luminous efficiency	106,8 lm/W

### Light distribution

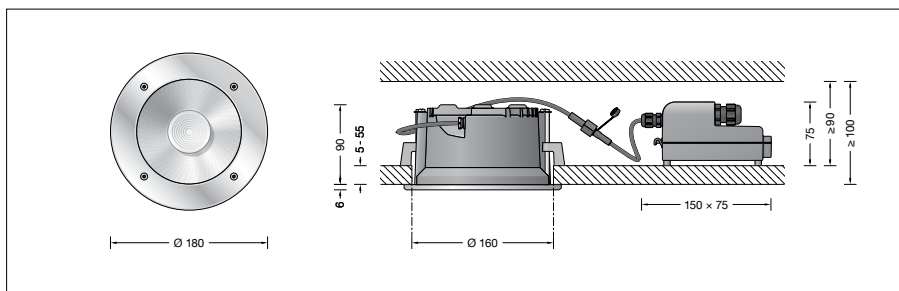

### Service life · Ambient temperature

Rated temperature  $t_a = 25^\circ\text{C}$   
 LED psu: > 50,000h  
 LED module: 75,000h (L 80 B 50)  
 100,000h (L 70 B 50)

Ambient temperature  $t_{a, \text{max}} = 25^\circ\text{C}$  (100 %)  
 LED psu: 50,000h  
 LED module: 75,000h (L 80 B 50)  
 100,000h (L 70 B 50)

### Lighting technology

Half beam angle 60°  
 Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

### Inrush current

Inrush current: 24 A / 115  $\mu\text{s}$   
 Maximum number of luminaires of this type per miniature circuit breaker:  
 B 10 A: 31 luminaires  
 B 16 A: 51 luminaires  
 C 10 A: 53 luminaires  
 C 16 A: 86 luminaires

### Article No. 24 295

LED colour temperature optionally 3000 K or 4000 K  
 3000 K – Article number + **K3**  
 4000 K – Article number + **K4**

### Accessories

**10 442** Installation housing

A separate instructions for use can be provided upon request.