

BEGA**24 373**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

LED wall luminaire with directed light.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
Matt safety glass
Silicone gasket
2 mounting holes \varnothing 5.5 mm
Distance apart 370 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm, max. 5G1.5[□]
Connection terminal 2.5[□]
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical
impacts < 2 joule
 – Safety mark
CE – Conformity mark
Weight: 2.4 kg

Lamp

Module connected wattage	18.4 W
Luminaire connected wattage	21.2 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 40$ °C


On request we can offer you modifications for
environments with higher temperatures as a
customized product.

24 373 K3

Module designation	LED-0520/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2540 lm
Luminaire luminous flux	1807 lm
Luminaire luminous efficiency	85,2 lm/W

24 373 K4

Module designation	LED-0520/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2540 lm
Luminaire luminous flux	1807 lm
Luminaire luminous efficiency	85,2 lm/W

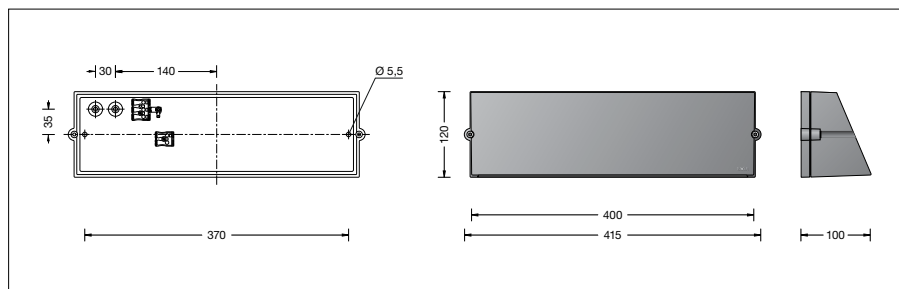

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L80 B50) 100,000 h (L90 B50)
Ambient temperature $t_{a \max} = 40$ °C (100 %)	
LED psu:	50,000 h
LED module:	93,000 h (L80 B50) 100,000 h (L70 B50)

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 31 luminaires
B 16A: 50 luminaires
C 10A: 52 luminaires
C 16A: 85 luminaires

Article No. 24 373

LED colour temperature optionally 3000K
or 4000K
3000 K – Article number + **K3**
4000 K – Article number + **K4**
Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

