

BEGA**31 035**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source and opal glass.

A luminaire shielded to the top for a host of lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel

BEGA Unidure® coating technology

Opal glass

Silicone gasket

Mounting plate with 2 fixing

holes \varnothing 4.5 mm · 40 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$

Connection terminal 2.5^{\square}

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

Impact strength IK06

Protection against mechanical

impacts < 1 joule

– Safety mark

CE – Conformity mark

Weight: 1.4 kg

Light technique


Luminaire data for the light planning program

DIALux for outdoor lighting, street lighting and

indoor lighting as well as luminaire data in

EULUMDAT- and IES-format you will find on the

BEGA web page www.bega.com.

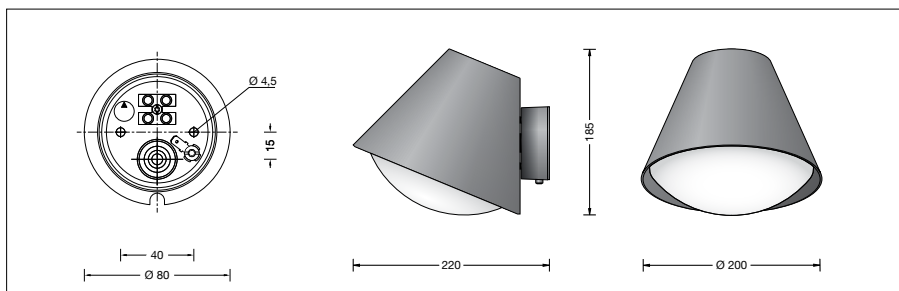

Lamp

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.