

**BEGA****31 118**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire with directed light.

A part of the light is distributed upwards and the shape of the luminaire thus remains visible even in darkness.

Luminaire with larger overhang and predefined light direction.

For the illumination of surfaces which are in front of the mounting surface.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel

BEGA Unidure® coating technology

Opal glass with screw neck

Silicone gasket

Mounting plate with 2 fixing holes  $\varnothing$  5,5 mm · 70 mm spacing

1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm max.  $3 \times 1,5$ □

Connection terminal 2.5□

Earth conductor connection

Lampholder E 27

Safety class I


Protection class IP 44

Protected against granular foreign bodies > 1 mm and splash water

Impact strength IK04

Protection against mechanical

impacts < 0.5 joule



 – Safety mark

**CE** – Conformity mark

Weight: 1.6 kg

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

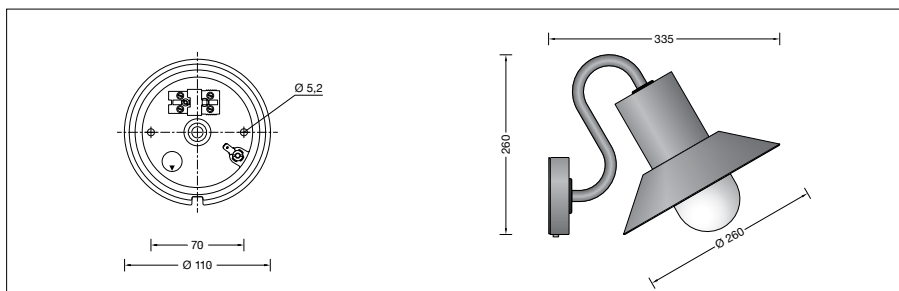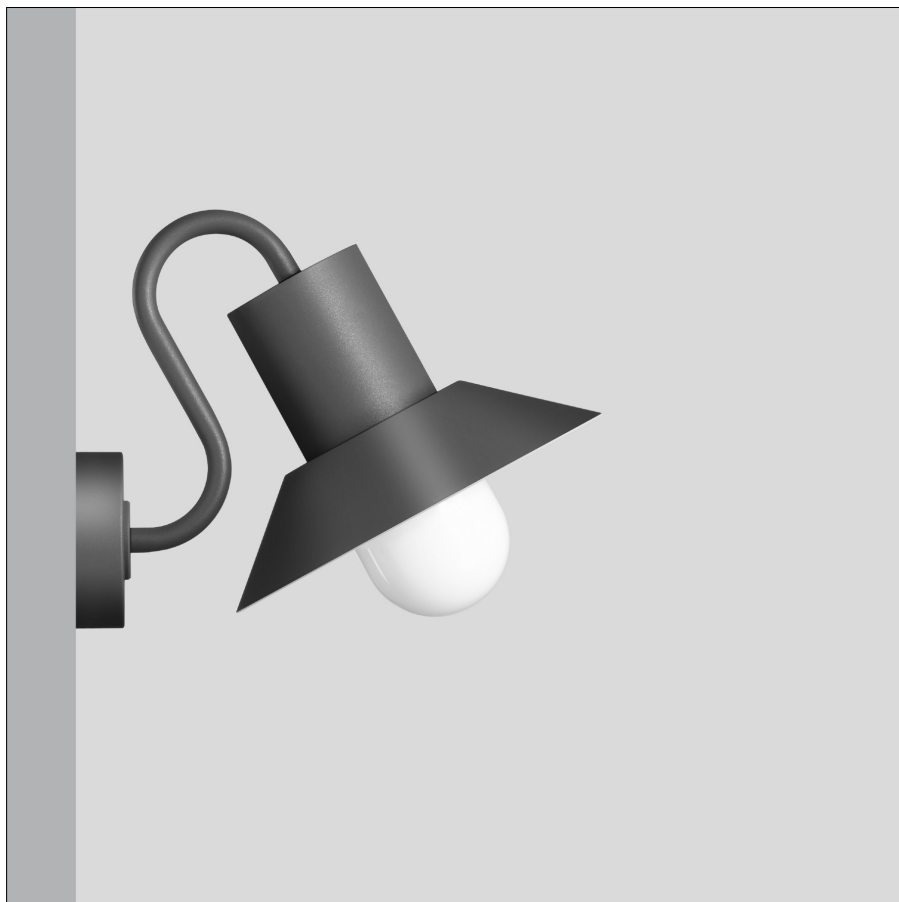

### Lamp

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimnable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.