BEGA 31 182

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Impact resistant LED wall luminaire made of massive bronze alloy.

Luminaire for versatile applications where a highly robust construction and corrosion resistance are required.

Product description

Luminaire made of bronze alloy and stainless steel Crystal glass with optical texture,

white inside

Silicone gasket

2 mounting holes ø 5.5 mm

Distance apart 114 mm

2 cable entries for through-wiring of mains

supply cable ø 7-10,5 mm,

max. 3G1.5⁻¹

Connection terminal 2.5

Earth conductor connection

LED power supply unit

220-240 V $\overline{\sim}$ 0/50-60 Hz

DC 176-264 V

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK06

Protection against mechanical

impacts < 1 joule

₹10 ♠ - Safety mark

C€ – Conformity mark

Weight: 3.8 kg

Duana

The luminaire is made of massive bronze and delivered with the metal's natural surface. Time and weather factors create the natural patina characteristic for bronze.

Inrush current

Inrush current: $7 \text{ A} / 112 \mu\text{s}$

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 38 luminaires B16A: 61 luminaires C10A: 64 luminaires C16A: 102 luminaires

Lamp


 $\begin{array}{lll} \mbox{Module connected wattage} & 3.9 \ \mbox{W} \\ \mbox{Luminaire connected wattage} & 5 \ \mbox{W} \\ \mbox{Rated temperature} & t_a = 25 \ \mbox{°C} \\ \mbox{Ambient temperature} & t_{a\,max} = 55 \ \mbox{°C} \\ \end{array}$

On request we can offer you modifications for environments with higher temperatures as a customized product.

31 182 K3

Module designation LED-0480/830
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 715 Im
Luminaire luminous flux* 150 Im
Luminaire luminous efficiency* 30 Im/W



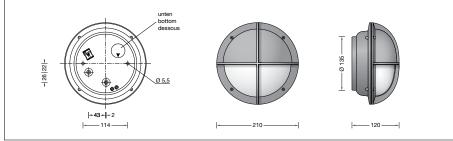

Lifetime of the LED

Ambient temperature t_a = 25 °C – at > 500,000 h: L70 B 50

max. ambient temperature t_a = 55 °C – at 162,000 h: L70 B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

^{*} preliminary data