

BEGA**31 196**

Wall luminaire



Project · Reference number


Date


Product data sheet

Application

Wall luminaire with directed light.
A shield made of aluminium screens the light of the luminaire upwards and forwards and directs it onto the surface to be illuminated.
A small light aperture on the back illuminates additionally the luminaire shape.
The luminaire can be installed with the light distribution opening directed upwards or downwards.

Product description

Luminaire made of aluminium and stainless steel
Antique glass
Silicone gasket
2 mounting holes \varnothing 4.5 mm
Distance apart 76 mm
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 14
Safety class I
Protection class IP 64
Dust-tight and protection against splash water
 – Safety mark
CE – Conformity mark
Weight: 0.9 kg

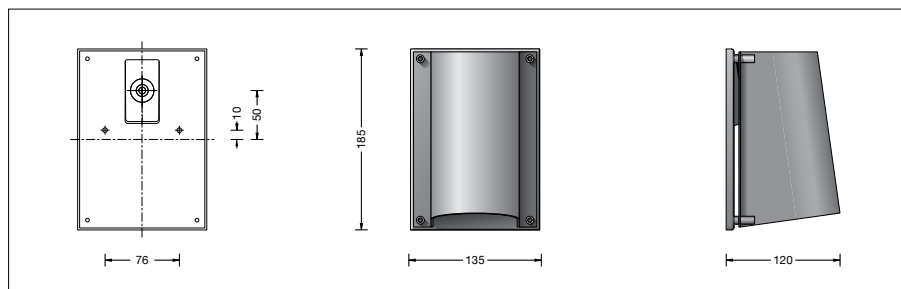

Lamp

Luminaire with lampholder E 14
Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

13 549 LED 4 W · 470 lm · 2700 K

13 553 LED 5 W · 470 lm · 2700 K
dimmmable

13 593 LED 4 W · 470 lm · 3000 K

13 595 LED 5 W · 470 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.