

BEGA**31 197**

Wall luminaire



Project · Reference number


Date


Product data sheet

Application

Wall luminaire with directed light.
A shield made of aluminium screens the light of the luminaire upwards and forwards and directs it onto the surface to be illuminated.
A small light aperture on the back illuminates additionally the luminaire shape.
The luminaire can be installed with the light distribution opening directed upwards or downwards.

Product description

Luminaire made of aluminium and stainless steel
Antique glass
Silicone gasket
2 mounting holes \varnothing 4.5 mm
Distance apart 100 mm
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 64
Dust-tight and protection against splash water
 – Safety mark
CE – Conformity mark
Weight: 1.4 kg

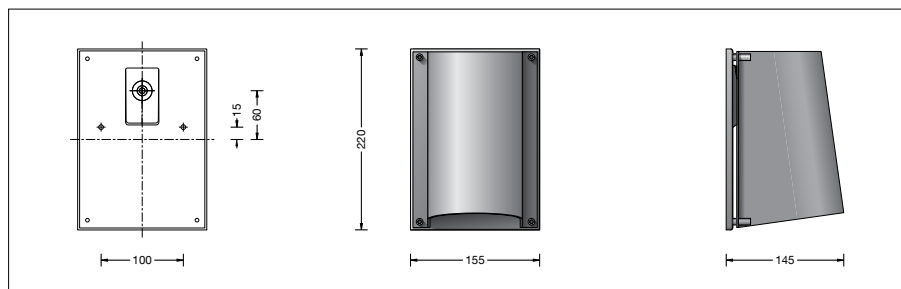

Lamp

Luminaire with lampholder E 27
Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13 509 LED 7 W · 805 lm · 2700 K

13 547 LED 7 W · 805 lm · 2700 K
dimnable

13 583 LED 7 W · 805 lm · 3000 K

13 585 LED 7 W · 805 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.