

BEGA**31 201**

Wall luminaire



Project · Reference number


Date


Product data sheet

Application

Wall luminaire for many lighting tasks on or in buildings.
Ideal for places where a soft and uniform light distribution is required.

Product description

Luminaire made of aluminium and stainless steel
Opal glass
Silicone gasket
Mounting plate with 2 fixing holes \varnothing 4.5 mm · 40 mm spacing
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
Lampholder E 14
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 1.0 kg

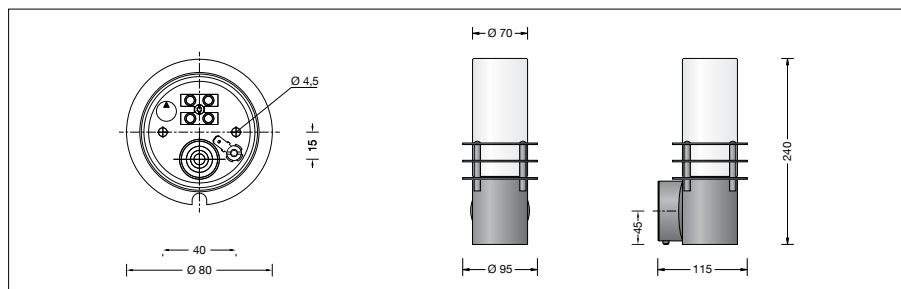

Lamp

Luminaire with lampholder E 14
Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · frosted · 2700 K

13 594 LED 4 W · 470 lm · frosted · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.