

BEGA**31 223**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of copper and hand-blown crystal bubble glass.

An annular shield which is positioned in the centre of the incandescent lamp prevents glare from the luminaire without affecting the brilliance of the crystal bubble glass.

For many lighting tasks in or on buildings.

Product description

Luminaire made of copper

Crystal bubble glass with screw neck

Silicone gasket

Mounting plate with 2 fixing

holes \varnothing 4,5 mm · 52 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$

Connecting terminals $2,5^{\square}$

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44


Protected against granular foreign bodies

> 1 mm and splash water

Impact strength IK06

Protection against mechanical

impacts < 1 joule

 – Safety mark


CE – Conformity mark

Weight: 2.1 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour.

Time and weather factors create the natural patina characteristic for copper.

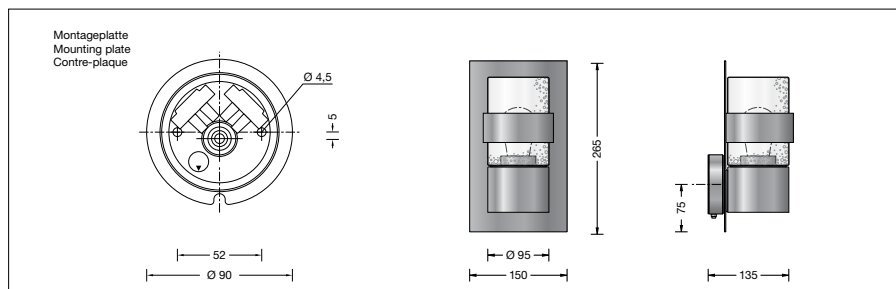

Lamp

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13 509 LED 7 W · 805 lm · 2700 K

13 547 LED 7 W · 805 lm · 2700 K
dimnable

13 583 LED 7 W · 805 lm · 3000 K

13 585 LED 7 W · 805 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.