

BEGA**33 035**

Lichtbaustein ®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein® Square
Ceiling and wall luminaire for many lighting tasks.
Ideal for places where a soft and uniform
lighting distribution is required.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Opal glass satin matt
Reflector made of pure anodised aluminium
2 mounting holes \varnothing 5.5 mm
Distance apart 200 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connecting terminal and
earth conductor terminal 2.5²
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
Impact strength IK02
Protection against mechanical
impacts < 0.2 joule
⚡¹⁰ ⚠ – Safety mark
CE – Conformity mark
Weight: 2.5 kg

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Lamps

Luminaire with lampholder E 27
Lamp output max. 2 × 60 W

For this luminaire we recommend the following
BEGA LED lamps:


13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

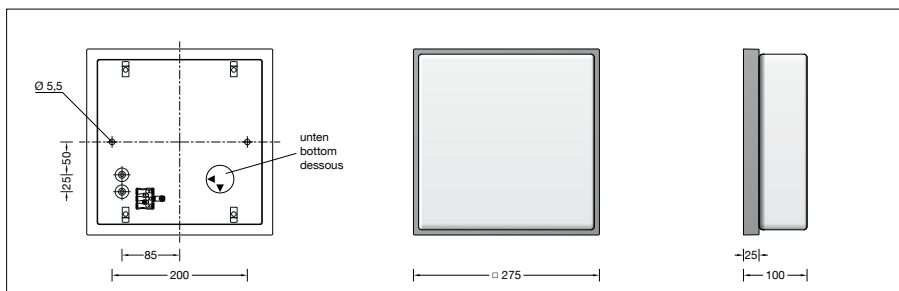

Article No. 33 035

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

