

BEGA**33 062**

Recessed luminaire



Project · Reference number

Date

Product data sheet

Application

LED luminaire with asymmetrical flat beam light distribution for installation in walls.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 Safety glass with optical structure
 Silicone gasket
 Reflector made of pure anodised aluminium
 Fixing is achieved by using two adjustable wedge-shaped claws
 Required recessed opening 315 x 110 mm
 Recessed depth 90 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5G1.5[□]
 Connecting terminal and earth conductor terminal 2.5[□]
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-280 V
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK08
 Protection against mechanical impacts < 5 joule
 – Safety mark
 CE – Conformity mark
 Weight: 2.0 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Module connected wattage	12.6 W
Luminaire connected wattage	14.8 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a\text{ max}} = 30\text{ °C}$

On request we can offer you modifications for environments with higher temperatures as a customized product.




33 062 K3

Module designation	LED-0575/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1695 lm
Luminaire luminous flux	1024 lm
Luminaire luminous efficiency	69,2 lm/W

33 062 K4

Module designation	LED-0575/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	1695 lm
Luminaire luminous flux	1024 lm
Luminaire luminous efficiency	69,2 lm/W

Light distribution

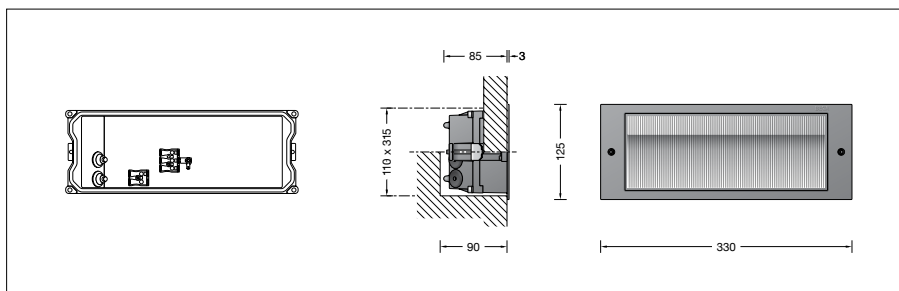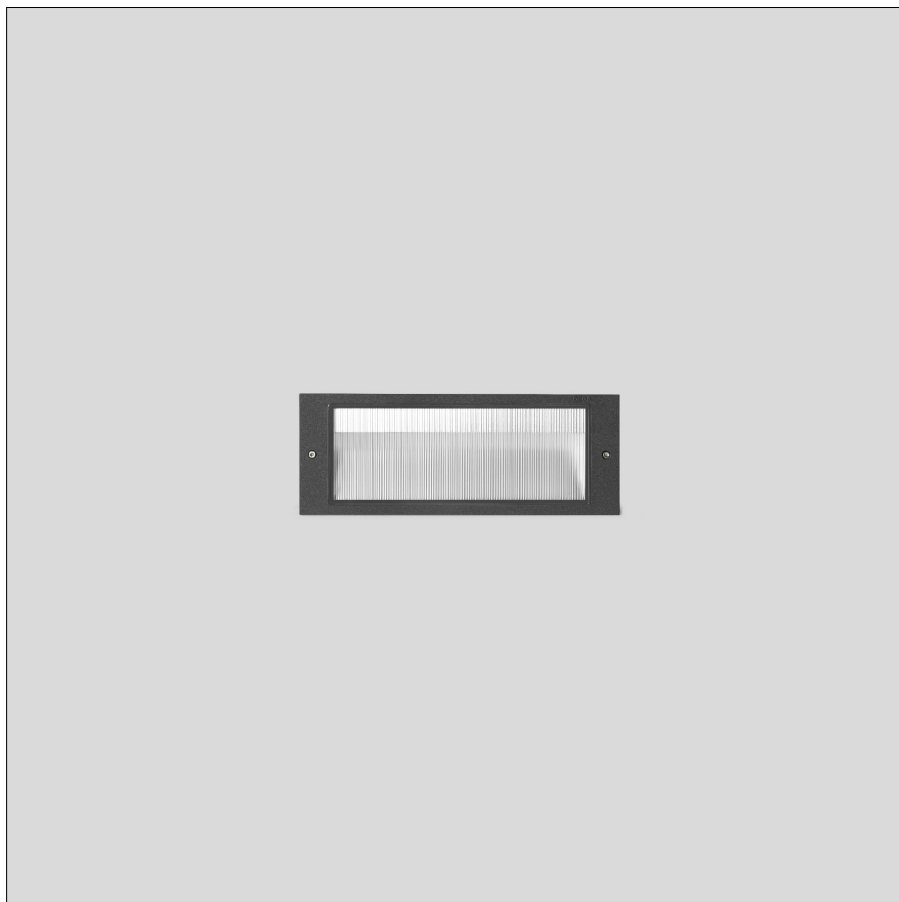

Service life · Ambient temperature

Ambient temperature $t_a = 25\text{ °C}$	
LED psu:	> 50,000 h
LED module:	123,000 h (L80 B50)
	100,000 h (L80 B50)

Ambient temperature $t_a = 30\text{ °C}$	
LED psu:	50,000 h
LED module:	91,000 h (L80 B50)
	100,000 h (L70 B50)

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B10A: 31 luminaires
 B16A: 50 luminaires
 C10A: 52 luminaires
 C16A: 85 luminaires

Article No. 33 062

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Accessories

10 436 Installation housing
13 522 Installation housing for installation in insulated façades (EWIS)

10 036 Plaster frame
13 506 Plaster frame flush

A separate instructions for use can be provided upon request.