

**BEGA****33 111**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

## Product data sheet

### Application

Unshielded luminaire made of stainless steel for installation under ceilings, on walls as well as on pillars and murals.

By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

### Product description

Luminaire made of stainless steel

Steel grade no. 1.4401

Opal glass with screw neck

Silicone gasket

Mounting plate with 2 fixing

holes  $\varnothing$  4,5 mm · 50 mm spacing

1 cable entry for mains supply cable

up to  $\varnothing$  10,5 mm max.  $3 \times 1,5^{\square}$

Connection terminal  $2,5^{\square}$


Earth conductor connection

Lampholder E 14

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

 – Safety mark

**CE** – Conformity mark

Weight: 0.6 kg

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Lamp

Luminaire with lampholder E 14


Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

**13 552** LED 4 W · 470 lm · frosted · 2700 K

**13 594** LED 4 W · 470 lm · frosted · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

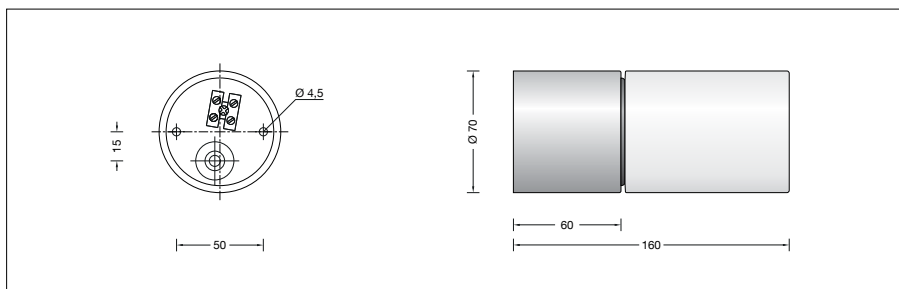

### Light distribution

