

BEGA**33 112**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire made of stainless steel for installation under ceilings, on walls as well as on pillars and murals.

By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

Product description

Luminaire made of stainless steel

Steel grade no. 1.4401

Opal glass with screw neck

Mounting plate with 2 fixing

holes \varnothing 5.5 mm · 70 mm spacing

2 cable entries for through-wiring of mains

supply cable \varnothing 7-10.5 mm

Connecting terminal 2.5[□]

with plug connection


Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

 – Safety mark

CE – Conformity mark

Weight: 0.8 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Luminaire with lampholder E 27

Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:


13 510 LED 7 W · 805 lm · 2700 K

13 548 LED 7 W · 805 lm · 2700 K
dimmable

13 584 LED 7 W · 805 lm · 3000 K

13 586 LED 7 W · 805 lm · 3000 K
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

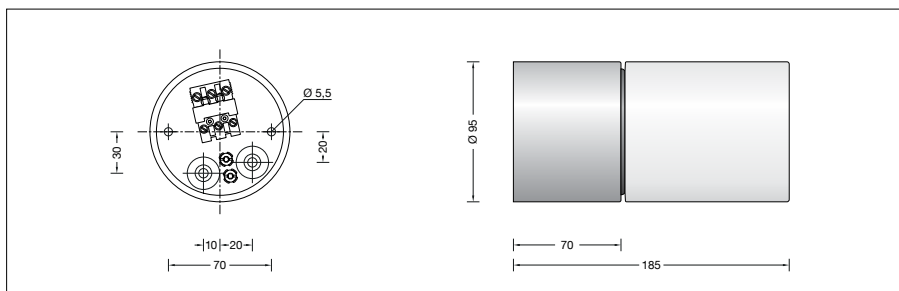

Light distribution

