

BEGA**33 147**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded wall luminaire made of aluminium alloy and hand-blown three-ply opal glass.
A luminaire with uniform light distribution for a variety of lighting tasks in interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel
BEGA Unidure® coating technology
Opal glass with sliding bolt glass closure
2 mounting holes \varnothing 5.5 mm
Distance apart 150 mm
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 2.2 kg

Lamp

Luminaire with lampholder E 27
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimmmable



13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimmmable

13512 LED 8 W · 1055 lm · 2700 K

13588 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

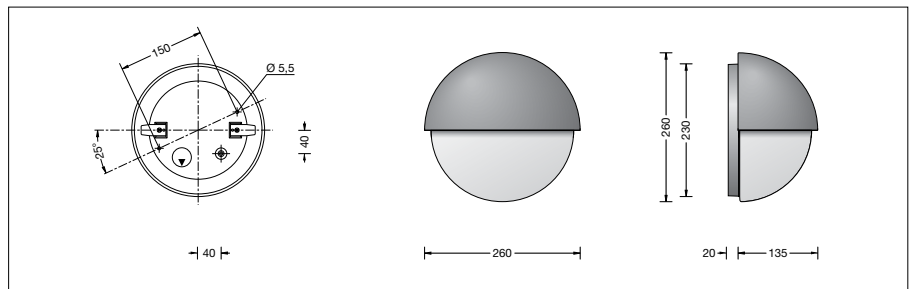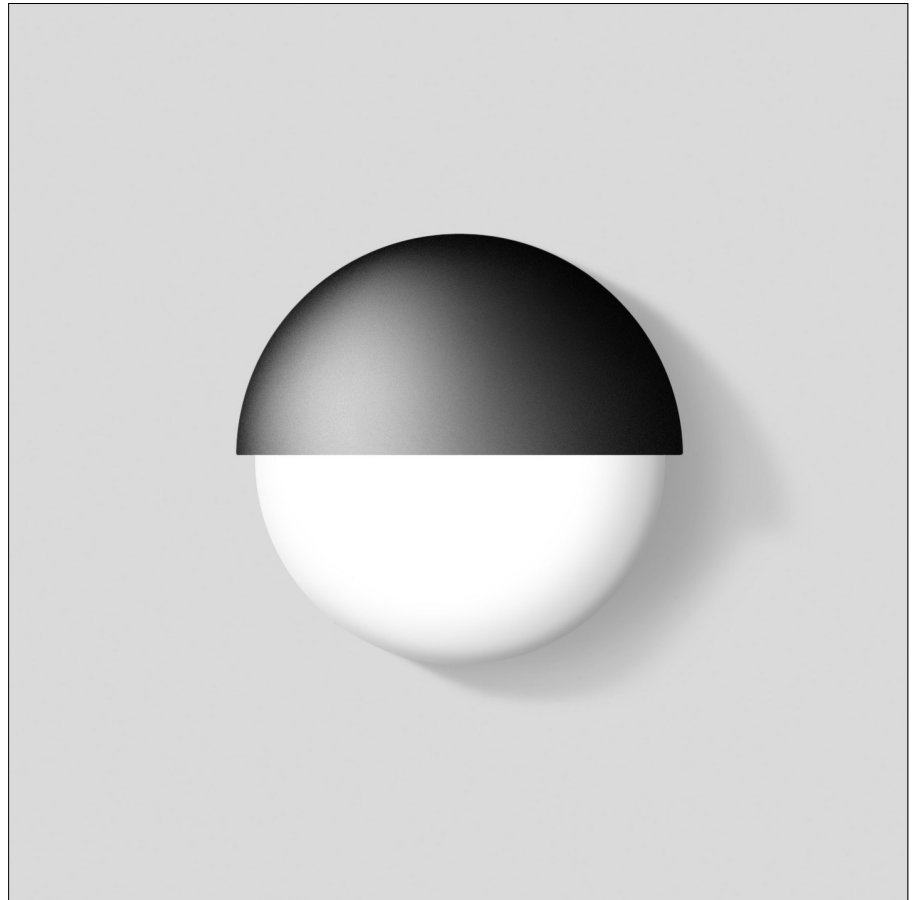

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 33 147

Colour optionally graphite or white
Graphite – Article number
White – Article number + **W**

Light distribution

